

## «Perfo Box» series of Filters and MultiPlexers

### Low Pass Filter PB-F1500DX, 1.8MHz (160m), 1500Watts ICAS\*

\* Intermittent Commercial and Amateur Service, (CW - 50% Duty cycle)

SKU: PB-F1500DX-1.8


#### Typical specifications:

Subject to change without prior notice, **please see attached actual specification as measured**

- |                                     |  |
|-------------------------------------|--|
| • Impedance:                        | 50 Ohm                                   |
| • Power rating:                     | 1500W ICAS**, max VSWR 1,5:1             |
| • Insertion loss:                   | ≤0,2db                                   |
| • Return loss:                      | ≥19db                                    |
| • VSWR:                             | ≤1,25:1                                  |
| • Connector:                        | SO-239 (UHF female)                      |
| • Cooling fan (option):             | 12VDC, 2200RPM, 29.9CFM                  |
| • Dimensions (L x W x H) mm/inches: | 450 x 145 x 145 mm / 17,7" x 5,7" x 5,7" |
| • Net weight, kg/lbs.:              | ≤2,2 kg / 4,9 lbs.                       |

#### Measured: adjacent bands attenuation (S21), VSWR and Insertion loss (S11).

#### Serial number #1219-380:

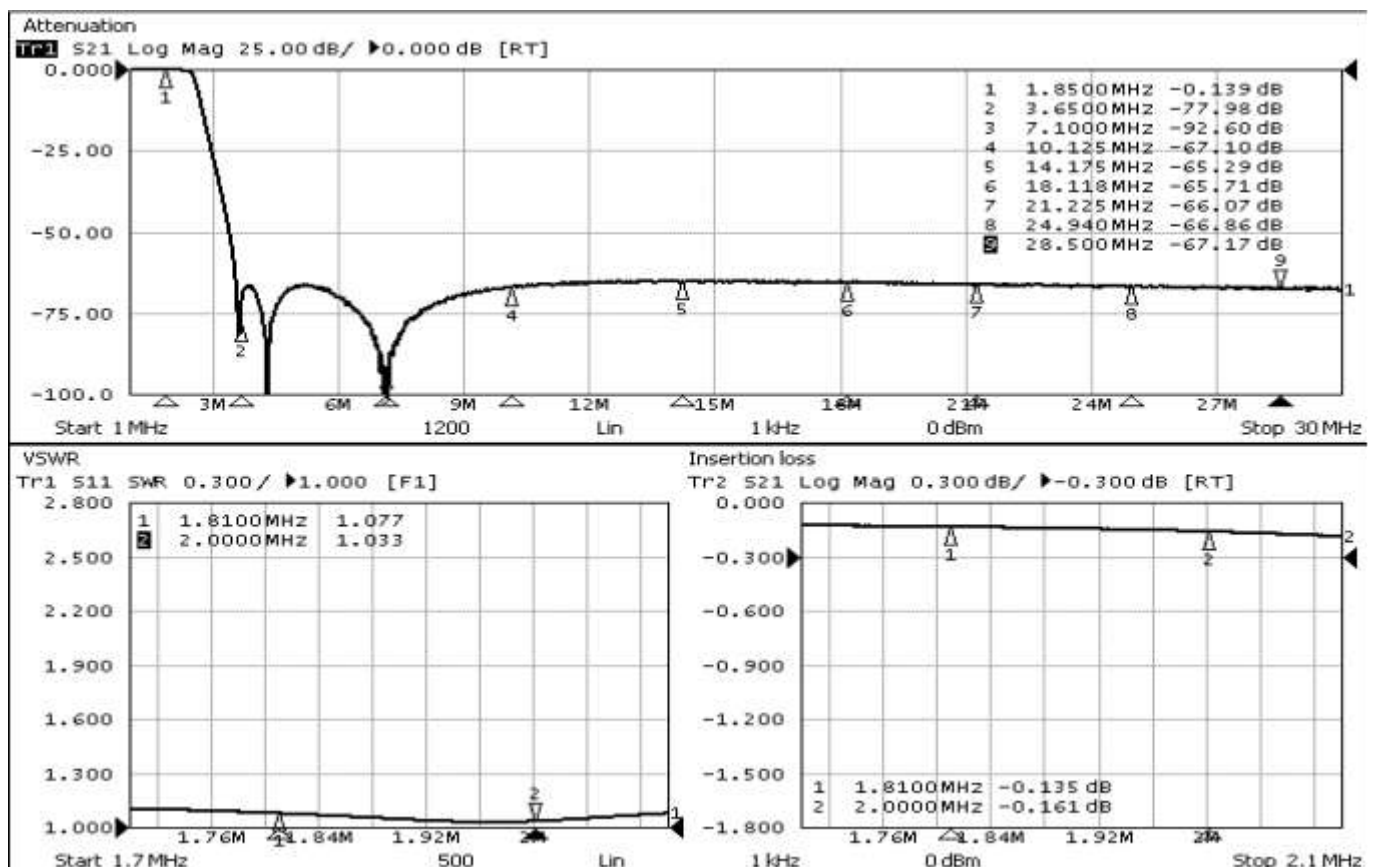

QC:

6 July, 2020

Page 1 of 1



LowBandSystems

Tel.: 007 918 557 45 07 (WhatsApp, Viber)

E-mail: ra6lbs@gmail.com

Volgodonsk, 347382, Russian Federation

[www.lowbandsystems.com](http://www.lowbandsystems.com)