

EMERGENCY EXIT SIGNS

EXIT S

MATERIALS:

White, grey or black polycarbonate body
Transparent polycarbonate cover
Plexi glass

MOUNTING:

Surface (wall, ceiling*)
Optionally recessed** (wall, ceiling*)
Optionally pendant*** (ceiling)

POWER SUPPLY:

Self contained – 220÷240VAC/50÷60Hz
Central battery –220÷240VAC/50÷60Hz; 176 - 275VDC
Central battery FZLV – 24VDC

LIGHT SOURCE:

1W, 2W LED

CHARGING:

BASIC: max. 24h
STANDARD: max. 24h
PREMIUM: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES:

BASIC: 1h or 3h, Ni-Cd 3,6V batteries
STANDARD: 1h or 3h, Ni-Cd 3,6V batteries
PREMIUM: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS:

II or III

IP RATING:

IP65

VIEWING DISTANCE:

20m

AMBIENT TEMPERATURE:

t_a: 0°C ÷ 40°C
t_a: -25°C ÷ 40°C – together with heater for low temperatures

OPTIONS:



SE – non maintained
SA – non maintained/maintained
PT – manual test button
AT – autotest
RU – Rubic UNA central monitoring
FZLV – central battery FZLV 24VDC
CB – central battery

ADDITIONAL INFORMATION:

LED indicator signalizes mains power supply and battery charging
Deep discharge protection
Optional adaptation of the fixture for low temperatures up to -25°C
III class of insulation of FZLV version
*additional plexi for two-sided emergency exit signs
**requires an accessory for recessed mounting
***requires an accessory for pendant mounting



DIMENSIONS (mm):

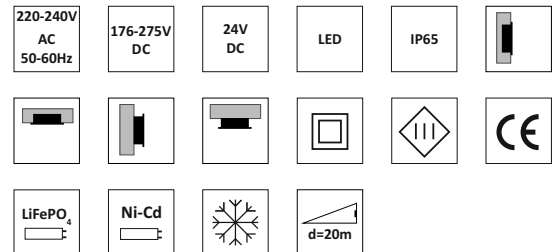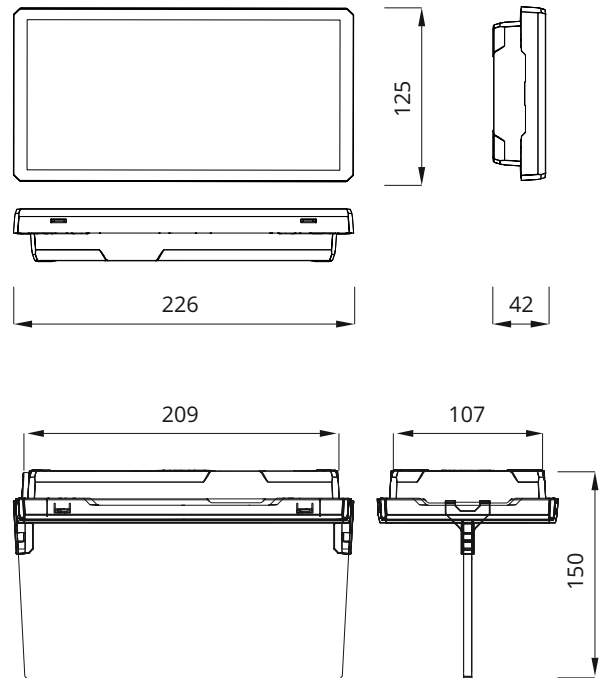

-see Pictogram

EMERGENCY EXIT SIGNS

SELF-CONTAINED CONFIGURATION

CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS	COLOR		
BASIC									
ETS	1W	E	1	3	SE	PT AT X	WH	GR	BL
STANDARD									
ETS	1W	C	1	3	SA	PT X	WH	GR	BL
ETS	2W	C	1	3	SA	PT X	WH	GR	BL
PREMIUM									
ETS	1W	B	1	3	SA	AT RU	WH	GR	BL
ETS	2W	B	1	3	SA	AT RU	WH	GR	BL

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS	COLOR		
ETS	1W	F	CB	CBS X	WH	GR	BL
ETS	2W	F	CB	CBS X	WH	GR	BL

CENTRAL BATTERY CONFIGURATION - ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS	COLOR		
ETS	1W	Z	CB	ADE ADP	WH	GR	BL
ETS	2W	Z	CB	ADE ADP	WH	GR	BL

FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM	COLOR		
ETS	1W	FZLV	WH	GR	BL
ETS	2W	FZLV	WH	GR	BL



LEGENDA:

- ETS – fitting EXIT S
- E – electronic gear for BASIC self-contained fittings
- C – electronic gear for STANDARD self-contained fittings
- B – electronic gear for PREMIUM self-contained fittings
- F – electronic gear for central battery fittings
- Z – electronic gear for addressable central battery fittings
- SE – non-maintained
- SA – non-maintained/maintained
- PT – manual test button
- X – fitting without additional options
- AT – autotest
- RU – RUBIC UNA central monitoring system
- CB – central battery version
- CBS – central battery for circuit monitoring
- ADE – central battery with ADE address module
- ADP – central battery with ADP address module – SMART technology
- FZLV – central battery FZLV 24 VDC
- WH – white color
- GR – grey color
- BL – black color