

«Perfo Box» series of Filters and MultiPlexers

Band Pass Filter PB-F1500DX, 7MHz (40m), 1500Watts ICAS*

* Intermittent Commercial and Amateur Service, (CW - 50% Duty cycle)

SKU: PB-F1500DX-7


Typical specifications:

Subject to change without prior notice, **please see attached actual specification as measured**

- | | |
|--------------------------------------|--|
| • Impedance: | 50 Ohm |
| • Power rating: | 1500W ICAS**, max VSWR 1,5:1 |
| • Insertion loss: | ≤0,6db |
| • Return loss: | ≥19db |
| • VSWR: | ≤1,25:1 |
| • Connector: | SO-239 (UHF female) |
| • Cooling fan (option): | 12VDC, 2200RPM, 29.9CFM |
| • Dimensions (L x W x H) mm/inches : | 450 x 145 x 145 mm / 17,7" x 5,7" x 5,7" |
| • Net weight, kg/lbs.: | ≤2,8 kg / 6,2 lbs. |

Measured: adjacent bands attenuation (S21), VSWR and Insertion loss (S11).

Serial number #0420-187:

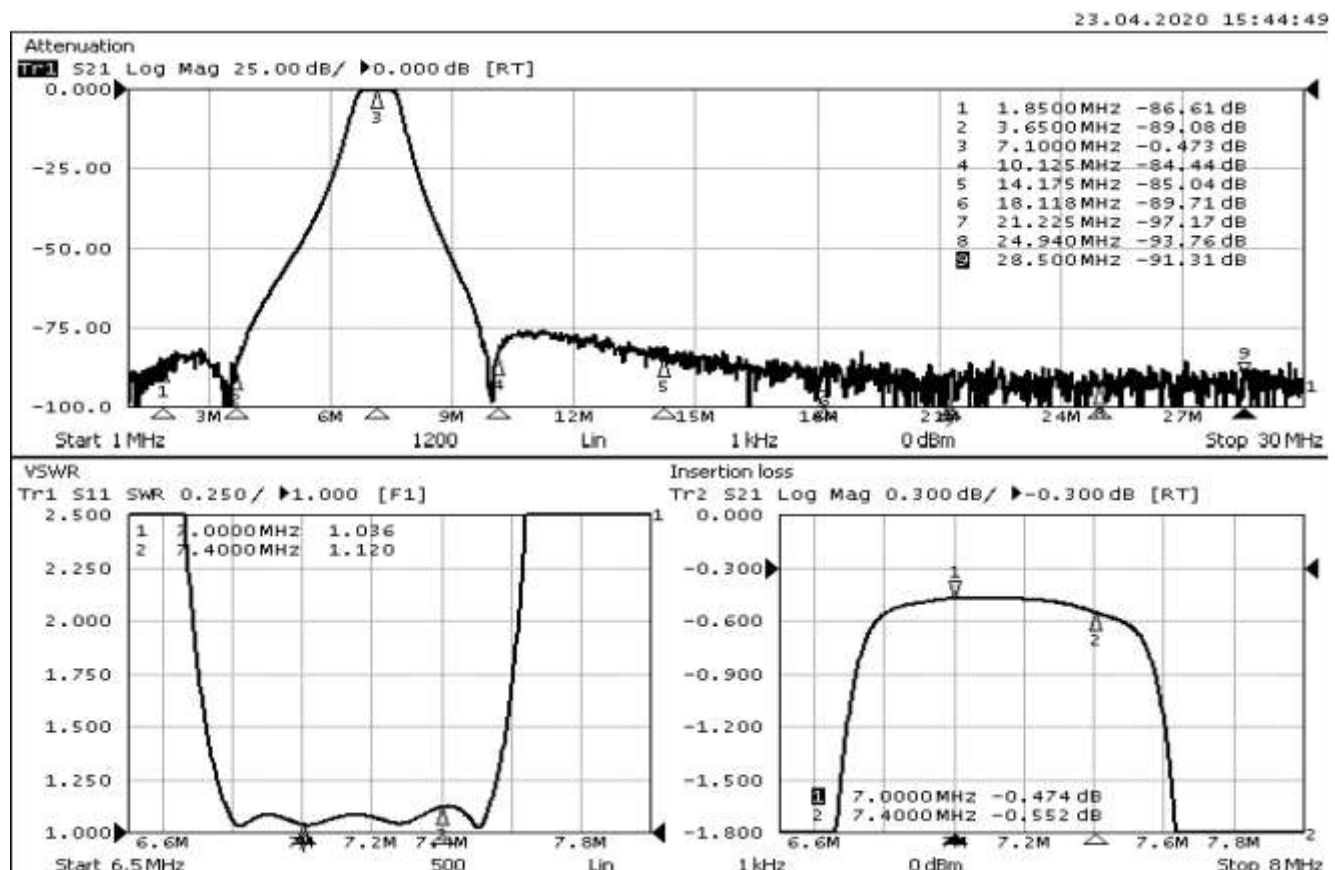

QC:

6 July, 2020

Page 1 of 1



LowBandSystems

Tel.: 007 918 557 45 07 (WhatsApp, Viber)

E-mail: ra6lbs@gmail.com

Volgodonsk, 347382, Russian Federation

www.lowbandsystems.com