

## EMERGENCY EXIT SIGNS

### INFINITY II AW

**MATERIALS:**

White or grey polycarbonate body  
Plexi glass

**MOUNTING:**

Surface (wall)  
Optionally recessed (wall\*\*)

**POWER SUPPLY:**

Self contained – 220 - 240VAC/50 - 60Hz  
Central battery – 220 - 240VAC/50 - 60Hz; 176 - 275VDC  
Central battery FZLV – 24VDC

**LIGHT SOURCE:**

1W ,2W LED

**CHARGING:**

STANDARD: max. 24h  
PREMIUM: max. 12h; energy-saving electronic charger

**AUTONOMY AND BATTERIES:**

STANDARD: 1h or 3h, Ni-Cd 3,6V batteries  
PREMIUM: 1h or 3h, LiFePO<sub>4</sub> 6,4V batteries

**INSULATION CLASS:**

II or III

**IP RATING:**

IP44

**VIEWING DISTANCE:**

30m

**AMBIENT TEMPERATURE:**

t<sub>a</sub>: 0°C - + 40°C

**OPTIONS:**


SE – non maintained  
SA – maintained  
AT – autotest  
PT – manual test button  
RU – Rubic UNA central monitoring  
FZLV – central battery FZLV 24VDC  
CB – central battery

**ADDITIONAL INFORMATION:**

LED indicator signalizes mains power supply and battery charge  
Deep discharge protection  
III class of insulation of FZLV version  
\*\*requires an accessory - concrete box



**DIMENSIONS (mm):**

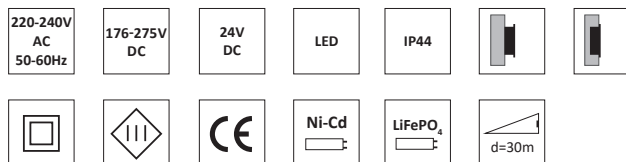

\*see pictogram

\*Emergency exit sign fixtures do not include any pictogram in the set. Pictograms have to be chosen and ordered as a separate item

## EMERGENCY EXIT SIGNS

### SELF-CONTAINED CONFIGURATION:

CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS			COLOR	
<b>STANDARD</b>										
IF2AWS	1W	C	1	3	SA	PT	X	WH	GR	
IF2AWS	2W	C	1	3	SA	PT	X	WH	GR	
<b>PREMIUM</b>										
IF2AWS	1W	B	1	3	SA	AT	RU	WH	GR	
IF2AWS	2W	B	1	3	SA	AT	RU	WH	GR	

### CENTRAL BATTERY CONFIGURATION – NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS			COLOR	
IF2AWS	1W	F	CB	CBS	X	WH	GR	
IF2AWS	2W	F	CB	CBS	X	WH	GR	

### CENTRAL BATTERY CONFIGURATION – ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS			COLOR	
IF2AWS	1W	Z	CB	ADE	ADP	WH	GR	
IF2AWS	2W	Z	CB	ADE	ADP	WH	GR	

### FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM	COLOR	
IF2AWS	1W	FZLV	WH	GR
IF2AWS	2W	FZLV	WH	GR

### LEGEND:

- IF2AWS – fixture INFINITY II AW
- C – electronic gear for STANDARD self-contained fittings
- B – electronic gear for PREMIUM self-contained fittings
- F – electronic gear for central battery fittings
- Z – electronic gear for addressable central battery fittings
- SE – non-maintained
- SA – maintained (with an option of connecting as non-maintained)
- PT – manual test button
- X – fitting without additional options
- AT – autotest
- RU – RUBIC UNA central monitoring system
- CB – central battery version
- CBS – central battery for circuit monitoring
- ADE – central battery with ADE address module
- ADP – central battery with ADP address module – SMART technology
- FZLV – central battery FZLV 24 VDC
- WH – white color
- GR – grey color