

«Perfo Box» series of Filters and MultiPlexers

Band Pass Filter PB-F1500DX, 21MHz (15m), 1500Watts ICAS*

* Intermittent Commercial and Amateur Service, (CW - 50% Duty cycle)

SKU: PB-F1500DX-21


Typical specifications:

Subject to change without prior notice, **please see attached actual specification as measured**

- Impedance: 50 Ohm
- Power rating: 1500W ICAS**, max VSWR 1,5:1
- Insertion loss: ≤0,5db
- Return loss: ≥19db
- VSWR: ≤1,25:1
- Connector: SO-239 (UHF female)
- Cooling fan (option): 12VDC, 2200RPM, 29.9CFM
- Dimensions (L x W x H) mm/inches: 450 x 145 x 145 mm / 17,7" x 5,7" x 5,7"
- Net weight, kg/lbs.: ≤2,5 kg / 5,5 lbs.

Measured: adjacent bands attenuation (S21), VSWR and Insertion loss (S11).

Serial number #1219-377:

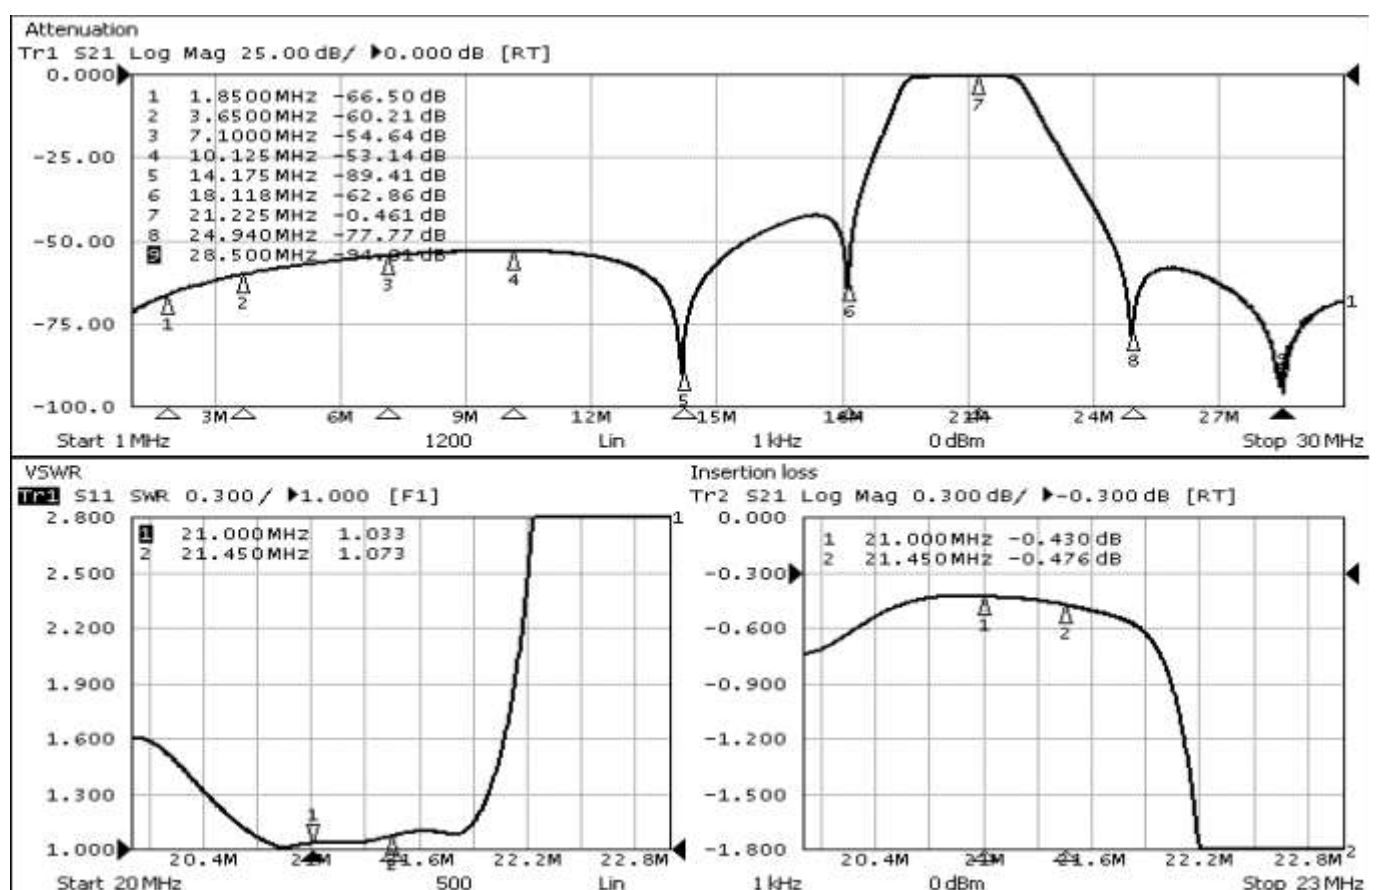

QC:

6 July, 2020

Page 1 of 1



LowBandSystems

Tel.: 007 918 557 45 07 (WhatsApp, Viber)

E-mail: ra6lbs@gmail.com

Volgodonsk, 347382, Russian Federation

www.lowbandsystems.com