

EMERGENCY EXIT SIGNS

TIGER & TIGER LED

MATERIALS:

White polycarbonate body
Transparent or opal polycarbonate cover

MOUNTING:

Surface (wall)
Optionally recessed (wall**)

POWER SUPPLY:

Self contained – 220 - 240VAC/50 - 60Hz
Central battery – 220 - 240VAC/50 - 60Hz; 176 - 275VDC
Central battery FZLV – 24VDC

LIGHT SOURCE:

1W, 2W LED
8W fluorescent lamp

CHARGING:

BASIC: max. 24h
STANDARD: max. 24h
PREMIUM: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES:

BASIC: 1h or 3h, Ni-Cd 3,6V batteries
STANDARD: 1h or 3h, Ni-Cd 3,6V batteries
PREMIUM: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS:

II or III

IP RATING:

IP22

VIEWING DISTANCE:

20m

AMBIENT TEMPERATURE:

t_a: 0°C÷40°C

OPTIONS:



SE – non maintained
SA – maintained
PT – manual test button
AT – autotest
RU – Rubic UNA central monitoring
FZLV – central battery FZLV 24VDC
CB – central battery

ADDITIONAL INFORMATION:

LED indicator signalizes mains power supply and battery charge
Deep discharge protection
III class of insulation of FZLV version
**requires an accessory for recessed mounting



DIMENSIONS (mm):

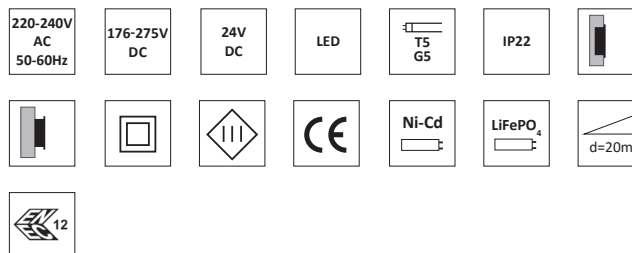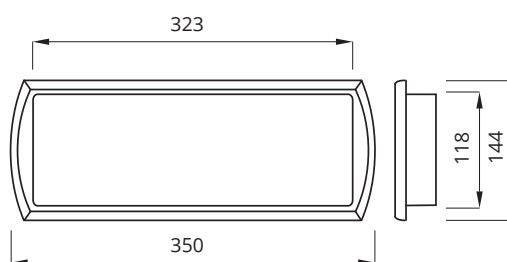

*see pictogram



KM 618355
BS-EN60592-2-22

*emergency exit sign fixtures do not include any pictogram in the set. Pictograms have to be chosen and ordered as a separate item.

**current list of products with Kitemark and ENEC is available at www.awex.eu

EMERGENCY EXIT SIGNS

SELF-CONTAINED CONFIGURATION:

| CODE | POWER | MODULE | AUTONOMY [h] | | MODE | OPTIONS | | COVER |
|-----------------|-------|--------|--------------|---|-------|----------|----|-------|
| BASIC | | | | | | | | |
| TL | 1W | E | 1 | 3 | SE | PT | X | OP |
| STANDARD | | | | | | | | |
| TL | 1W | C | 1 | 3 | SA | PT | X | OP |
| TL | 2W | C | 1 | 3 | SA | PT | X | OP |
| TG | 8W | T | 1 | 3 | SE SA | PT AT RU | | TR |
| PREMIUM | | | | | | | | |
| TL | 1W | B | 1 | 3 | SA | AT | RU | OP |
| TL | 2W | B | 1 | 3 | SA | AT | RU | OP |

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

| CODE | POWER | MODULE | SYSTEM | OPTIONS | | COVER |
|------|-------|--------|--------|---------|---|-------|
| TL | 1W | F | CB | CBS | X | OP |
| TL | 2W | F | CB | CBS | X | OP |
| TG | 8W | T | CB | CBS | X | TR |

CENTRAL BATTERY CONFIGURATION - ADDRESSABLE

| CODE | POWER | MODULE | SYSTEM | OPTIONS | | COVER |
|------|-------|--------|--------|---------|-----|-------|
| TL | 1W | Z | CB | ADE | ADP | OP |
| TL | 2W | Z | CB | ADE | ADP | OP |
| TG | 8W | T | CB | ADL | ADS | TR |

FZLV SYSTEM CONFIGURATION

| CODE | POWER | SYSTEM | COVER |
|------|-------|--------|-------|
| TL | 1W | FZLV | OP |
| TL | 2W | FZLV | OP |

LEGEND:

- TG - fixture Tiger
- TL - fixture Tiger LED
- E - electronic gear for BASIC self-contained fittings
- C - electronic gear for STANDARD self-contained fittings
- B - electronic gear for PREMIUM self-contained fittings
- F - electronic gear for central battery fittings
- Z - electronic gear for addressable central battery fittings
- T - electronic gear for LFL fittings
- SE - non-maintained
- SA - maintained (with an option of connecting as non-maintained)
- PT - manual test button
- X - fitting without additional options
- AT - autotest
- RU - RUBIC UNA central monitoring system
- CB - central battery version
- CBS - central battery for circuit monitoring
- ADL - central battery with ADL module
- ADS - central battery with ADS address module - SMART technology
- ADE - central battery with ADE address module
- ADP - central battery with ADP address module - SMART technology
- FZLV - central battery FZLV 24 VDC
- TR - transparent polycarbonate cover
- OP - opal polycarbonate cover