

## «Perfo Box» series of Filters and MultiPlexers

### Band Pass Filter PB-F1500DX, 28MHz (10m), 1500Watts ICAS\*

\* Intermittent Commercial and Amateur Service, (CW - 50% Duty cycle)

SKU: PB-F1500DX-28


#### Typical specifications:

Subject to change without prior notice, **please see attached actual specification as measured**

- Impedance: 50 Ohm
- Power rating: 1500W ICAS\*\*, max VSWR 1,5:1
- Insertion loss: ≤0,4db
- Return loss: ≥19db
- VSWR: ≤1,25:1
- Connector: SO-239 (UHF female)
- Cooling fan (option): 12VDC, 2200RPM, 29.9CFM
- Dimensions (L x W x H) mm/inches : 450 x 145 x 145 mm / 17,7" x 5,7" x 5,7"
- Net weight, kg/lbs.: ≤2,1 kg / 4,6 lbs.

#### Measured: adjacent bands attenuation (S21), VSWR and Insertion loss (S11).

#### Serial number #1219-376:

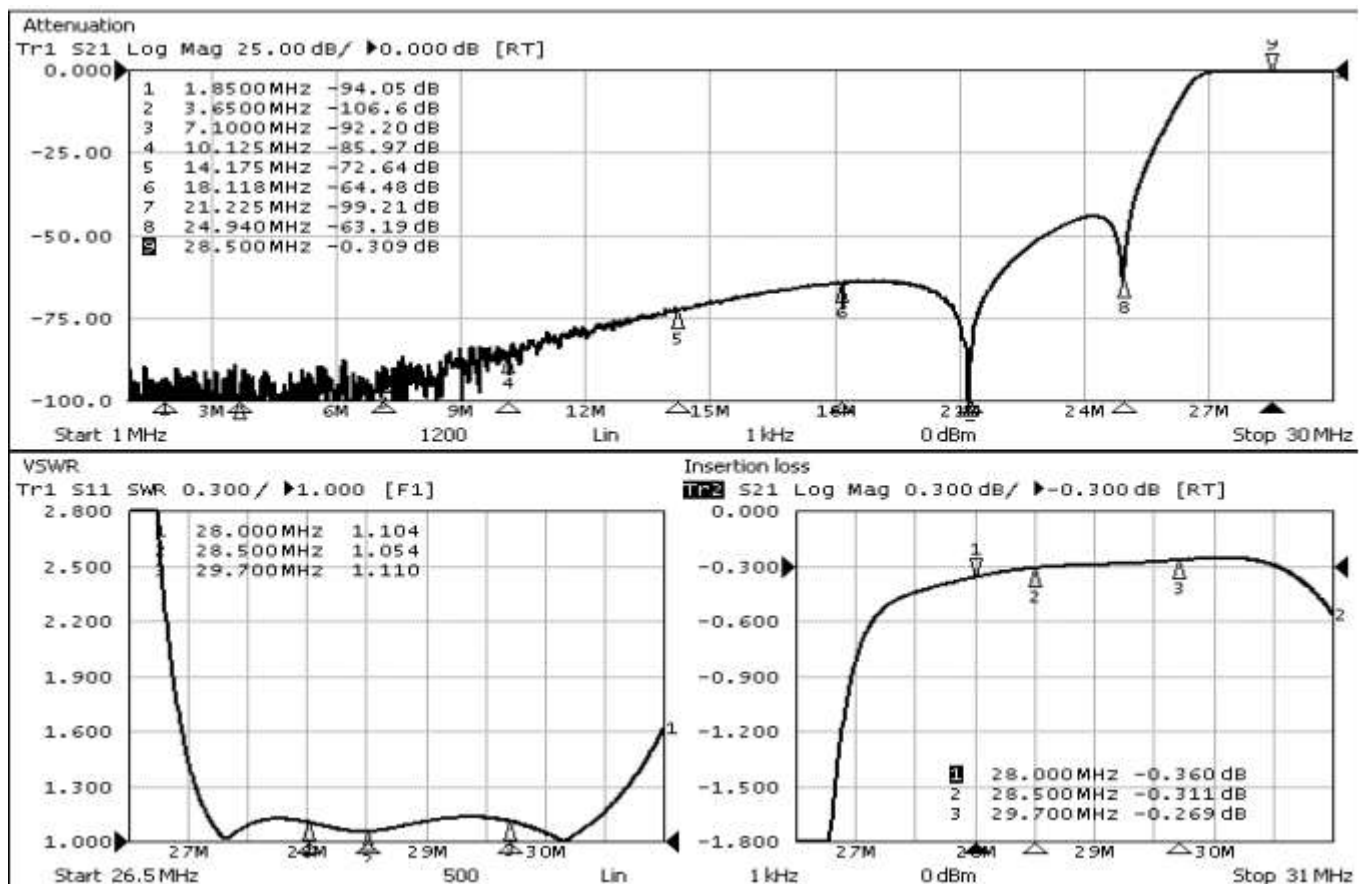

QC:

6 July, 2020

Page 1 of 1



LowBandSystems

Tel.: 007 918 557 45 07 (WhatsApp, Viber)

E-mail: ra6lbs@gmail.com

Volgodonsk, 347382, Russian Federation

[www.lowbandsystems.com](http://www.lowbandsystems.com)