

EMERGENCY EXIT SIGNS

PANORAMA & PANORAMA LED

MATERIALS:

White plastic body
Opal plastic cover

MOUNTING:

Surface (wall)

POWER SUPPLY:

Self contained – 220÷240VAC/50÷60Hz
Central battery – 220÷240VAC/50÷60Hz; 176 - 275VDC
Central battery FZLV – 24VDC

LIGHT SOURCE:

1W, 2W LED
8W fluorescent lamp

CHARGING:

BASIC: max. 24h
STANDARD: max. 24h
PREMIUM: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES:

BASIC: 1h or 3h, Ni-Cd 3,6V batteries
STANDARD: 1h or 3h, Ni-Cd 3,6V batteries
PREMIUM: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS:

II or III

IP RATING:

IP54

VIEWING DISTANCE:

30m

AMBIENT TEMPERATURE:

t_a: 0°C ÷ 40°C

OPTIONS:


SE – non maintained
SA – maintained
PT – manual test button
AT – autotest
RU – Rubic UNA central monitoring
FZLV – central battery FZLV 24VDC
CB – central battery

ADDITIONAL INFORMATION:

LED indicator signalizes mains power supply and battery charging
Deep discharge protection
III class of insulation of FZLV version



DIMENSIONS (mm):

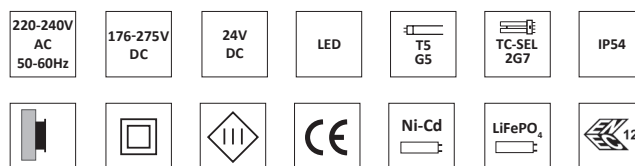

*see pictogram



KM 618355
BS-EN60592-2-22

*emergency exit sign fixtures do not include any pictogram in the set. Pictograms have to be chosen and ordered as a separate item.

**current list of products with Kitemark and ENEC is available at www.awex.eu

EMERGENCY EXIT SIGNS

SELF-CONTAINED CONFIGURATION

CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS	
BASIC							
PML	1W	E	1	3	SE	PT	X
STANDARD							
PML	1W	C	1	3	SA	PT	X
PML	2W	C	1	3	SA	PT	X
P	8W	T	1	3	SE SA	PT AT RU	
PREMIUM							
PML	1W	B	1	3	SA	AT	RU
PML	2W	B	1	3	SA	AT	RU

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS
PML	1W	F	CB	CBS X
PML	2W	F	CB	CBS X
P	8W	T	CB	CBS X

CENTRAL BATTERY CONFIGURATION - ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS
PML	1W	Z	CB	ADE ADP
PML	2W	Z	CB	ADE ADP
P	8W	T	CB	ADL ADS

FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM
PML	1W	FZLV
PML	2W	FZLV

LEGEND:

- P – fixture Panorama
- PML – fixture Panorama LED
- C – electronic gear for STANDARD self-contained fittings
- B – electronic gear for PREMIUM self-contained fittings
- F – electronic gear for central battery fittings
- Z – electronic gear for addressable central battery fittings
- SE – non-maintained
- SA – maintained (with an option of connecting as non-maintained)
- PT – manual test button
- X – fitting without additional options
- AT – autotest
- RU – RUBIC UNA central monitoring system
- CB – central battery version
- CBS – central battery for circuit monitoring
- ADS – central battery with ADS address modul - SMART technology
- ADL – central battery with ADL address module
- ADE – central battery with ADE address module
- ADP – central battery with ADP address module – SMART technology
- FZLV – central battery FZLV 24 VDC