


# FT Series

## FTB12-150 12V150Ah

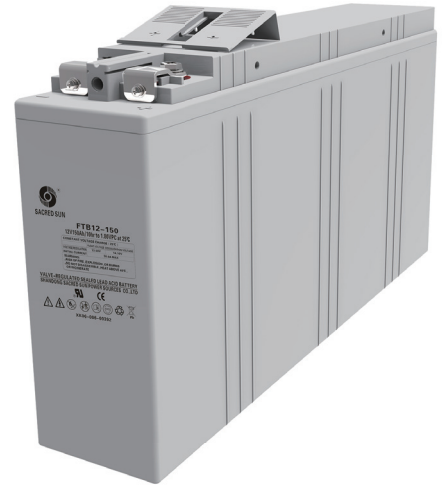

Sacred Sun front terminal batteries have been designed specifically for applications which demand the highest levels of security and reliability. The monoblocs have excellent high rate performance, compact design and standard footprint for 19" and 23" cabinets. Thick Pb-Ca-Sn alloy grids are designed to resist corrosion and prolong service life.

### Benefits

- Long life according to EUROBAT Classification
- High discharge performance
- High gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Easy installation and handling
- Centralized venting system


### Applications

- Telecommunications
- Power system
- UPS
- Emergency power
- Data center

### Standards

- IEC 60896-21/22
- BS 6290-4
- EUROBAT guide

### Drawing

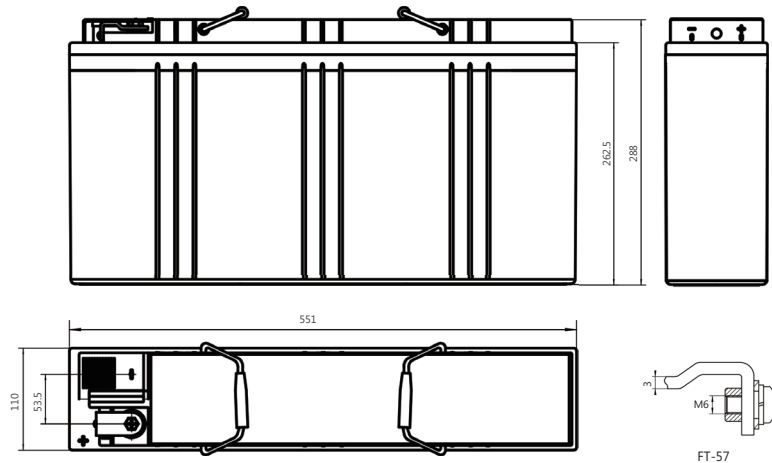

### Specifications


Battery Model	FTB12-150			
Design Life (years, 25°C)	12			
Capacity (Ah, 25°C)	10HR (15.0A, 1.80V)	5HR (26.79A, 1.80V)	3HR (39.71A, 1.80V)	1HR(83.8A, 1.75V)
	150	133.93	118.21	83.8
Dimensions (mm)	Length	Width	Height	Total Height
	551	110	288	288
Approx. Weight (kg)	45.0			
Reference Internal Resistance (mΩ)	3.6 ( fully charged @ 25°C)			
Maximum Discharge Current (A/3 Sec.)	1092			
Self-Discharge (25°C)	≤ 1.5% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.35 (-3.5mV/°C/cell), max charge current: 30A		2.25 (-3.5mV/°C/cell)	
Short Circuit Current (A)	3200			

## Discharge Data


Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min					h								
	5	10	15	30	45	1	2	3	4	5	6	8	10	20
1.60	412.3	329.8	272.6	186.8	130.2	99.2	59.3	42.62	34.8	28.10	23.93	18.57	15.60	8.38
1.65	385.3	302.1	258.4	175.0	119.7	93.9	57.9	41.43	34.2	27.74	23.93	18.45	15.36	8.30
1.70	354.2	271.8	238.2	163.3	111.0	85.5	56.4	40.60	33.6	27.50	23.57	18.33	15.36	8.25
1.75	326.5	249.1	223.9	156.6	108.2	83.4	55.5	40.12	33.0	27.14	23.33	18.10	15.12	8.22
1.80	291.2	231.4	206.1	143.9	97.2	77.2	54.0	39.40	32.7	26.79	23.10	17.86	15.0	8.19

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min					h								
	5	10	15	30	45	1	2	3	4	5	6	8	10	20
1.60	706.0	568.0	491.0	312.0	245.0	187	113.2	78.60	63.5	52.80	45.10	34.20	29.80	15.50
1.65	675.0	535.0	476.0	305.0	238.0	182	112.3	77.30	63.1	52.50	44.80	34.10	29.75	15.45
1.70	642.0	498.0	450.0	295.0	231.0	173	110.9	76.50	62.8	52.30	44.50	34.00	29.7	15.40
1.75	605.0	467.0	432.0	288.0	223.0	167	110.2	75.30	62.2	51.60	44.20	33.80	29.60	15.35
1.80	563.0	450.0	415.0	279.0	196.0	155	108.8	74.20	61.8	51.20	43.80	33.60	29.5	15.30


## Performance Curve

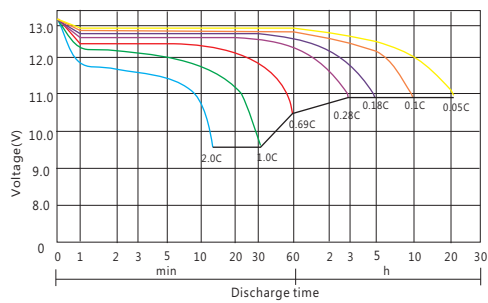


Discharge voltage vs. discharge time

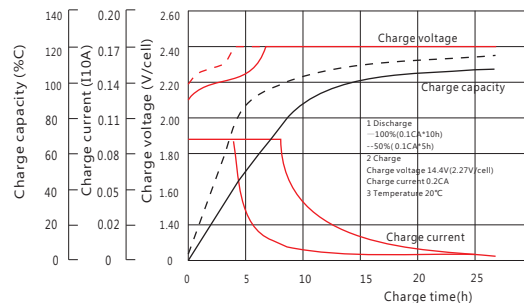

Charge capacity vs. charge time

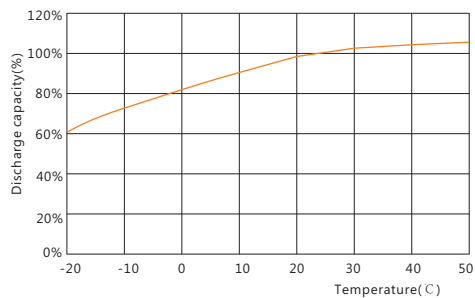

Discharge capacity vs. temperature

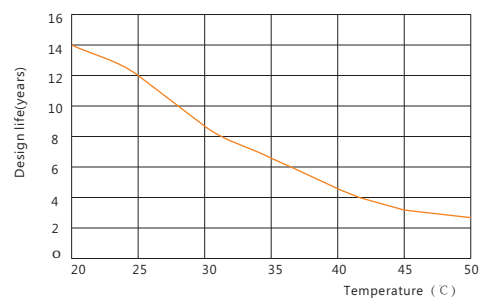

Design life vs. temperature

### Sacred Sun Power Sources Co., Ltd.

No.1 Shengyang Road Qufu City, PRC  
sales@sacredsun.cn

### Sacred Sun Asia Pacific

No. 15, Yishun Industrial Street 1,  
#01-17, WIN5, Singapore 768091  
sales.asia@sacredsun.cn

### Sacred Sun Europe SPRL

Schoenstraat 96-9140 Temse, Belgium  
sales.eu@sacredsun.cn

### Sacred Sun MEA FZE

S10122A1019 Jebel Ali, Dubai,  
United Arab Emirates  
sales.mea@sacredsun.cn

