

«Perfo Box» series of Filters and MultiPlexers

TriPlexer PB-TP200, 3.5-7-14MHz*, 200Watts ICAS**

* 80 meter band: 3,500 ÷ 4,000Mhz; 40 meter band: 7,000 ÷ 7,400Mhz

** Intermittent Commercial and Amateur Service, (CW - 50% Duty cycle)

SKU: PB-TP200804020


Typical specifications:

Subject to change without prior notice, **please see attached actual specification as measured**

- Impedance: 50 Ohms
- Maximum ICAS power per band port: 200W
- Maximum ICAS power at antenna port: 400W, (please see [Application notes](#))
- VSWR: ≤1,2:1
- Return loss: ≥20db
- Size: 200 x 125 x 70 mm / 7,9" x 4,9" x 2,8"
- Net weight: ≤0,65 kg / 1,5 lbs


Band INPUT to Antenna OUTPUT, insertion loss (S11) and adjacent bands attenuation (S21), worst possible numbers **at the band edges** rounded to 0,05db / 5db, unused port terminated 50 ohms:

Transmit	Receive level, db.:		
	3.5	7	14
3.5 - 4.0	≤ -0.2	≥ -30	≥ -40
7	≥ -20	≤ -0.2	≥ -40
14	≥ -45	≥ -30	≤ -0.25




Band to Band, Isolation from port to port (S21), worst possible numbers **at the band edges** rounded to 5db, Antenna and unused port terminated 50 ohms:

Transmit	Receive level, db.:		
	3.5	7	14
3.5 - 4.0	-	≥ -30	≥ -40
7	≥ -20	-	≥ -40
14	≥ -45	≥ -30	-



Band INPUT to Antenna OUTPUT, insertion loss (S11) and **Band to Band Isolation from port to port** (S21), **with Band Pass Filters «Perfo Box-200»**, worst possible numbers **at the band edges** rounded to 0,05db / 5db, Antenna port and unused ports terminated 50ohms:

Transmit	Receive level, db.:		
	3.5	7	14
3.5 - 4.0	≤ -0.8	≥ -100	≥ -100
7	≥ -70	≤ -0.7	≥ -100
14	≥ -100	≥ -100	≤ -0.6

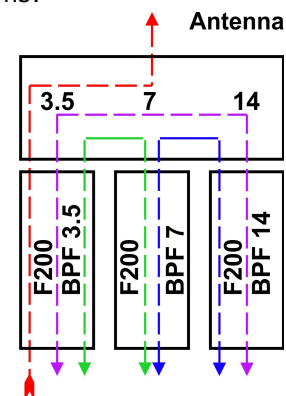

QC:

10 March, 2020

Page 1 of 4



LowBandSystems

Tel.: 007 918 557 45 07 (WhatsApp, Viber)

E-mail: ra6lbs@gmail.com

Volgodonsk, 347382, Russian Federation


www.lowbandsystems.com

«Perfo Box» series of Filters and MultiPlexers


TriPlexer PB-TP200, 3.5-7-14MHz, 200Watts ICAS

Specification as measured, serial number #0419-033:

3.5MHz port: Insertion loss (S11), VSWR and adjacent bands attenuation (S21) to antenna port

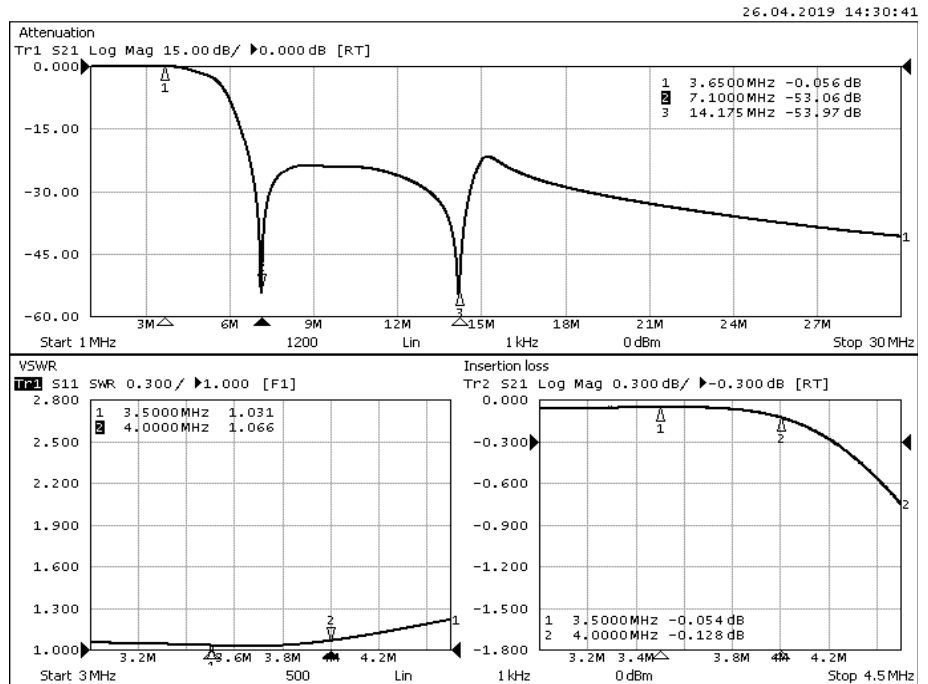

7MHz port: Insertion loss (S11), VSWR and adjacent bands attenuation (S21) to antenna port

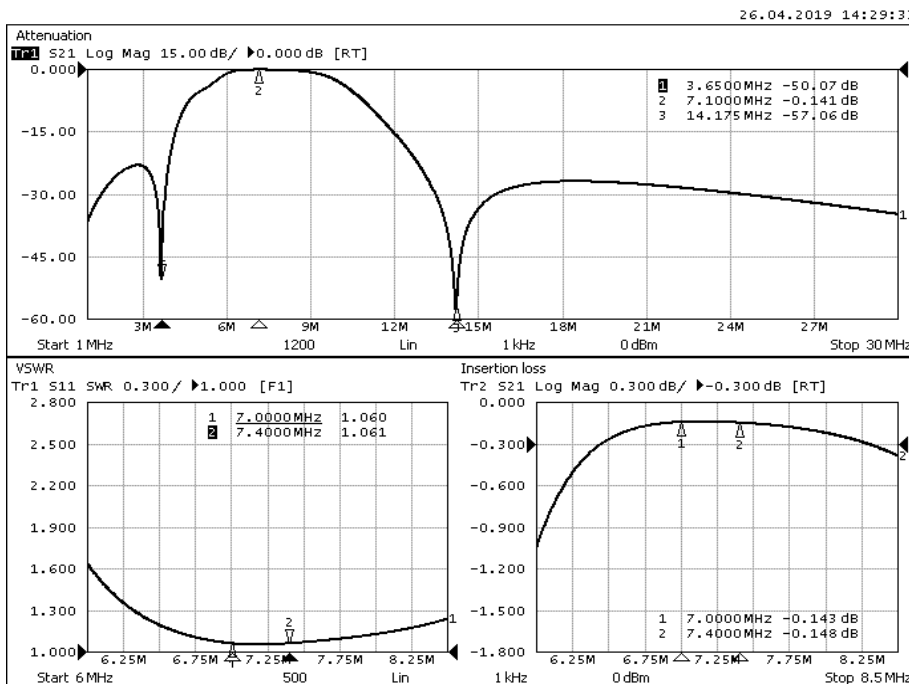

QC:

10 March, 2020

Page 2 of 4



LowBandSystems
Tel.: 007 918 557 45 07 (WhatsApp, Viber)
E-mail: ra6lbs@gmail.com
Volgodonsk, 347382, Russian Federation


www.lowbandsystems.com

«Perfo Box» series of Filters and MultiPlexers


TriPlexer PB-TP200, 3.5-7-14MHz, 200Watts ICAS

Specification as measured, serial number #0419-033:

14MHz port: Insertion loss (S11), VSWR and adjacent bands attenuation (S21) to antenna port

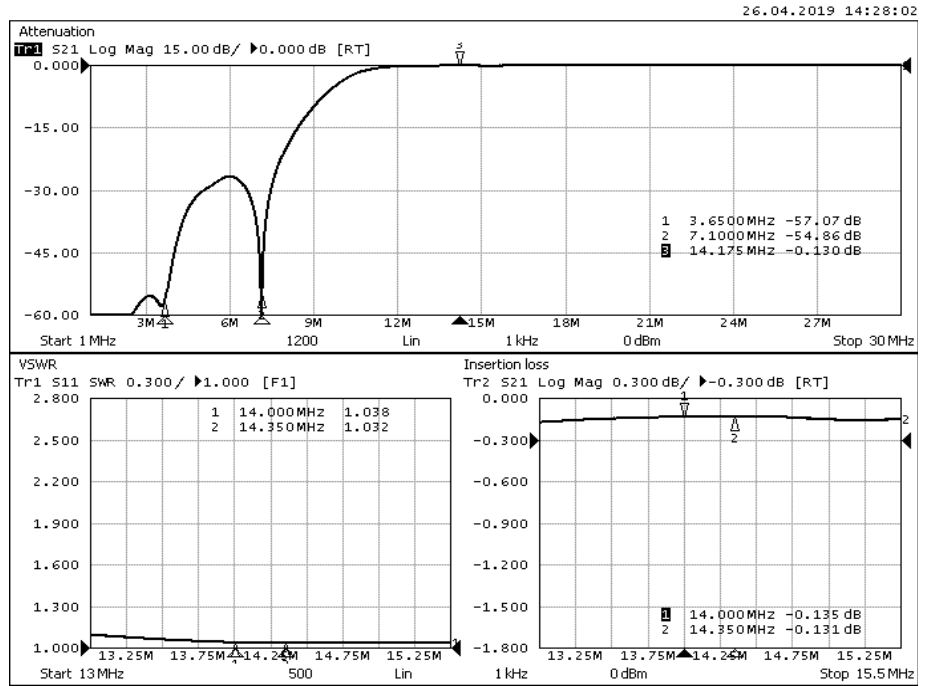

Isolation: 3.5MHz port to 7MHz port

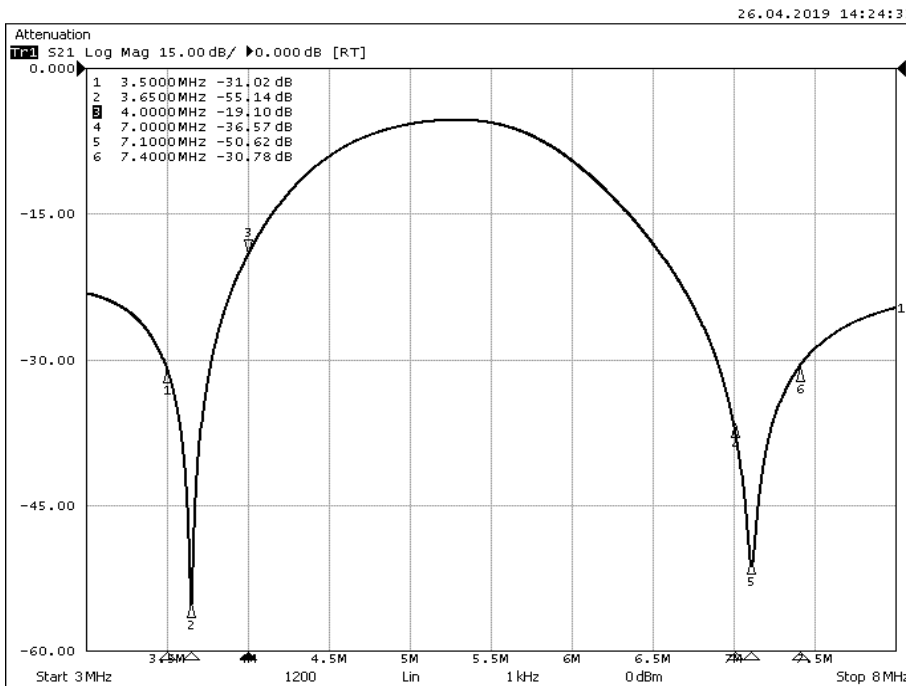

QC:

10 March, 2020

Page 3 of 4




LowBandSystems
Tel.: 007 918 557 45 07 (WhatsApp, Viber)
E-mail: ra6lbs@gmail.com
Volgodonsk, 347382, Russian Federation

www.lowbandsystems.com


TriPlexer PB-TP200, 3.5-7-14MHz, 200Watts ICAS

Specification as measured, serial number #0419-033:

Isolation: 3.5MHz port to 14MHz port

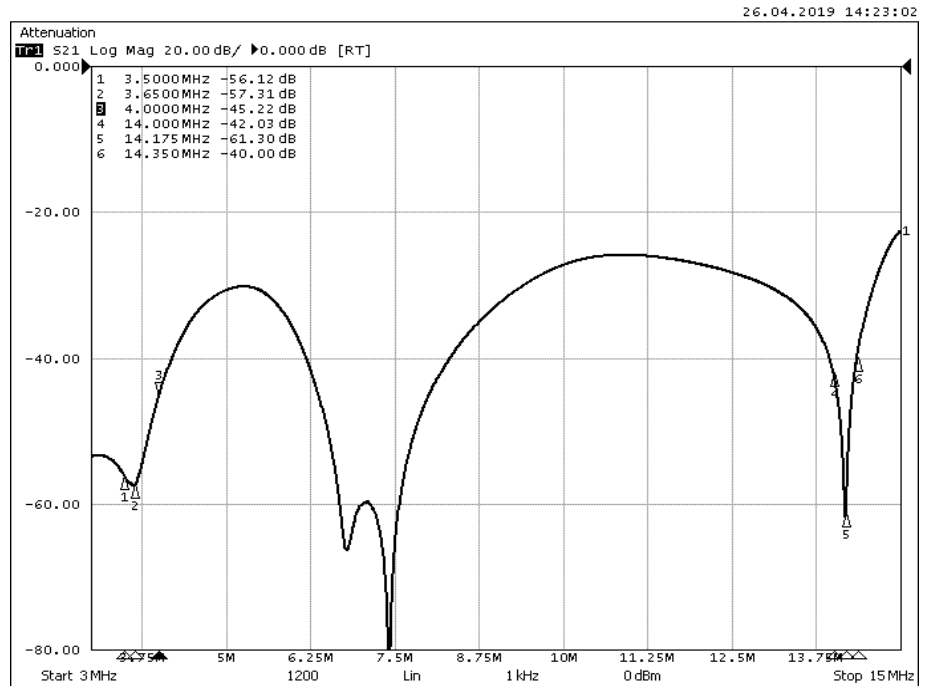

Isolation: 7MHz port to 14MHz port

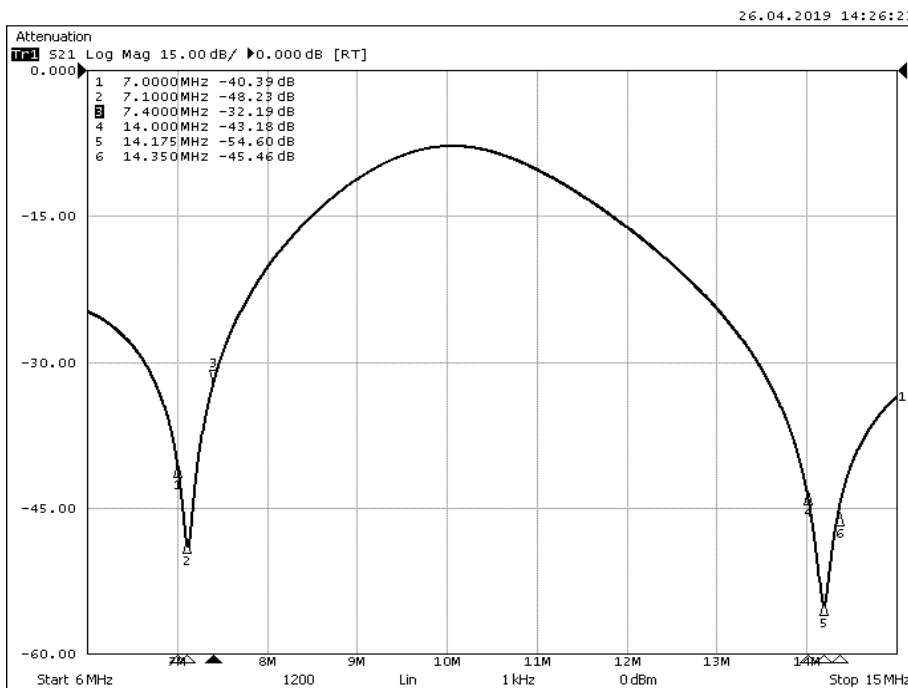

QC:

10 March, 2020

Page 4 of 4

