

«Perfo Box» series of Filters and MultiPlexers

Band Pass Filter PB-F500, 21MHz (15m), 500Watts ICAS

SKU: PB-F500-21

Typical specifications*:


- Impedance: 50 Ohm
- Power rating: 500W ICAS**, max VSWR 1,5:1
- Insertion loss: ≤0,5db
- Return loss: ≥20db
- VSWR: ≤1,2:1
- Connector: SO-239 (UHF female)
- Dimensions (L x W x H) mm/inches: 220 x 140 x 65 mm / 8,7" x 5,6" x 2,6"
- Net weight, kg/lbs.: ≤0,8 kg / 1,8 lbs.

* Subject to change without prior notice

** Intermittent **C**ommercial and **A**mateur **S**ervice, (CW - 50% Duty cycle)

Measured: adjacent bands attenuation (S21), VSWR and Insertion loss (S11)

Serial number #0818-554:

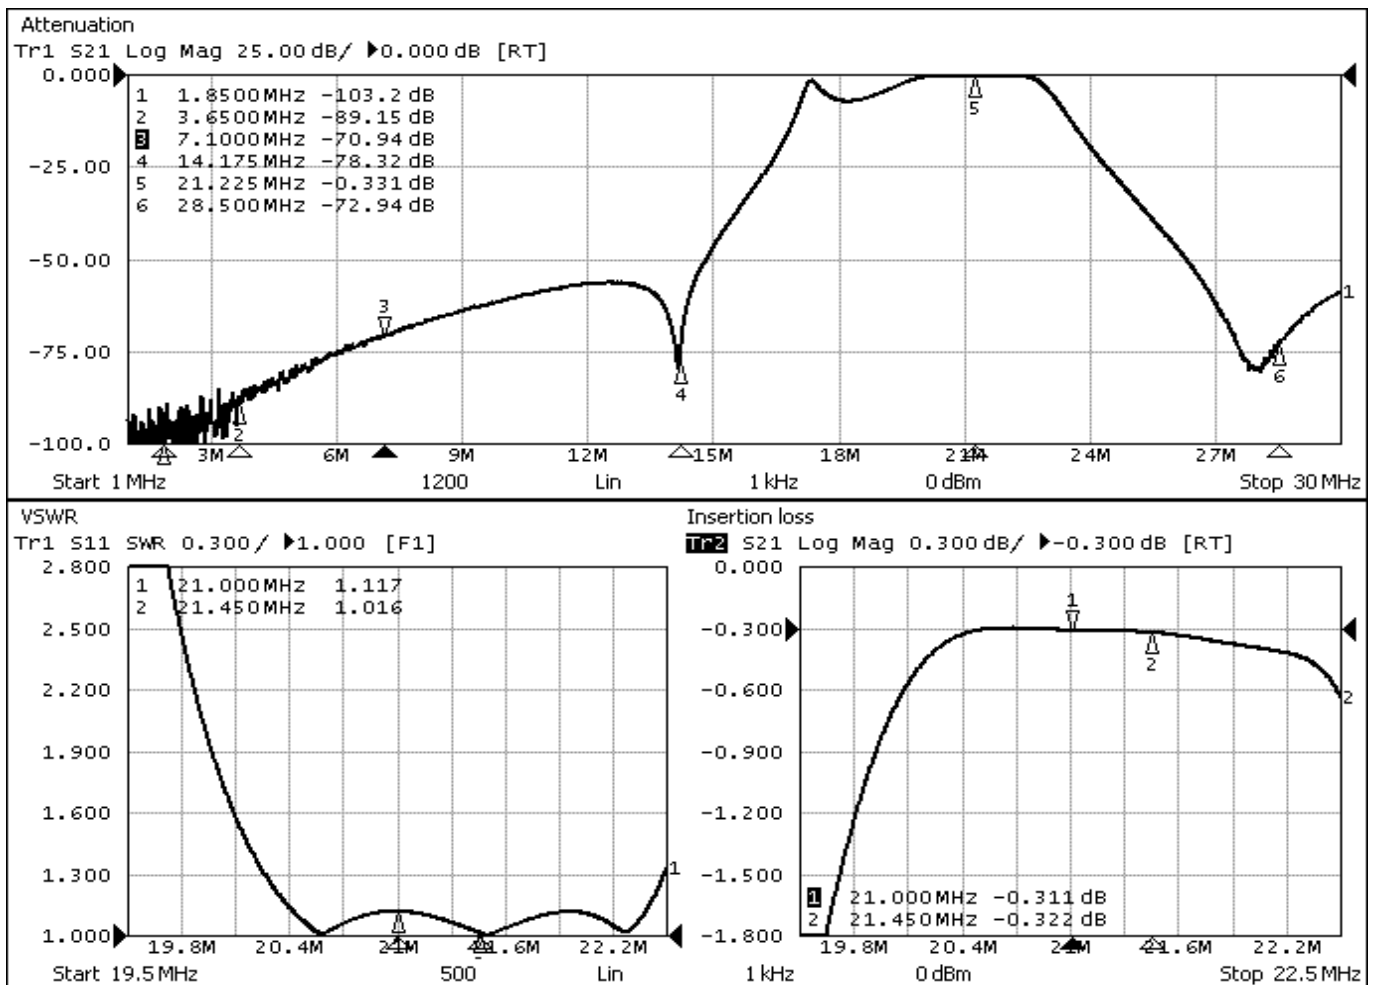

QC:

19 April, 2019

Page 1 of 1



LowBandSystems

Tel.: 007 918 557 45 07 (WhatsApp, Viber)

E-mail: ra6lbs@gmail.com

Volgodonsk, 347382, Russian Federation

www.lowbandsystems.com