

EMERGENCY EXIT SIGNS

EXIT L

MATERIALS:

White, grey or black polycarbonate body
Transparent polycarbonate cover
Plexi glass

MOUNTING:

Surface (wall, ceiling)
Optionally recessed** (wall, ceiling)
Optionally pendant*** (ceiling)

POWER SUPPLY:

Self contained – 220÷240VAC/50÷60Hz
Central battery – 220÷240VAC/50÷60Hz; 176 - 275VDC
Central battery FZLV – 24VDC

LIGHT SOURCE:

1W, 2W LED

CHARGING:

BASIC: max. 24h
STANDARD: max. 24h
PREMIUM: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES:

BASIC: 1h or 3h, Ni-Cd 3,6V batteries
STANDARD: 1h or 3h, Ni-Cd 3,6V batteries
PREMIUM: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS:

II or III

IP RATING:

IP65

VIEWING DISTANCE:

30m

AMBIENT TEMPERATURE:

t_a: 0°C ÷ 40°C
t_a: -25°C ÷ 40°C – together with heater for low temperatures

OPTIONS:



SE – non maintained
SA – non maintained/maintained
PT – manual test button
AT – autotest
RU – Rubic UNA central monitoring
FZLV – central battery FZLV 24VDC
CB – central battery

ADDITIONAL INFORMATION:

LED indicator signalizes mains power supply and battery charging
Deep discharge protection
Optional adaptation of the fixture for low temperatures up to -25°C
III class of insulation of FZLV version
**requires an accessory for recessed mounting
***requires an accessory for pendant mounting



DIMENSIONS (mm):

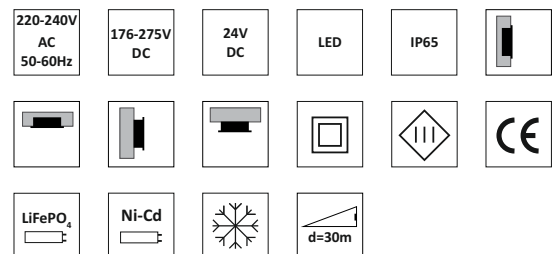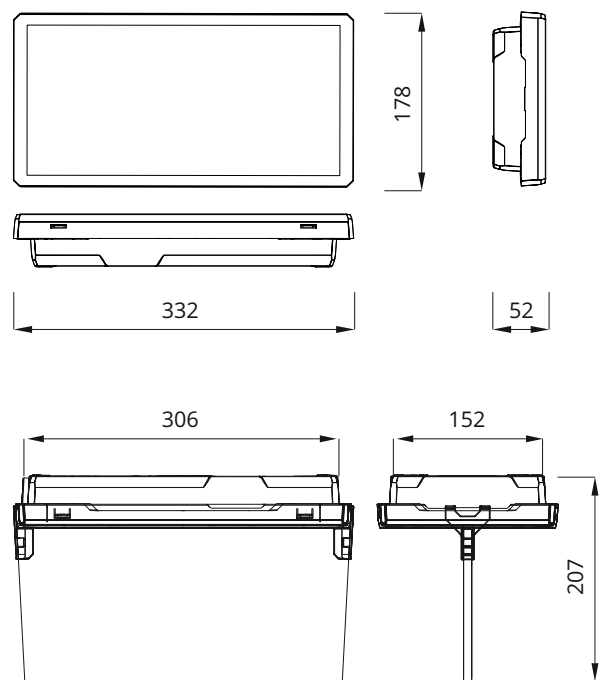

-see Pictogram

EMERGENCY EXIT SIGNS

SELF-CONTAINED CONFIGURATION

CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS		COLOR		
BASIC										
ETL	1W	E	1	3	SE	PT	AT X	WH	GR	BL
STANDARD										
ETL	1W	C	1	3	SA	PT	X	WH	GR	BL
ETL	2W	C	1	3	SA	PT	X	WH	GR	BL
PREMIUM										
ETL	1W	B	1	3	SA	AT	RU	WH	GR	BL
ETL	2W	B	1	3	SA	AT	RU	WH	GR	BL

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ETL	1W	F	CB	CBS	X	WH	GR	BL
ETL	2W	F	CB	CBS	X	WH	GR	BL

CENTRAL BATTERY CONFIGURATION - ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ETL	1W	Z	CB	ADE	ADP	WH	GR	BL
ETL	2W	Z	CB	ADE	ADP	WH	GR	BL

FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM	COLOR		
ETL	1W	FZLV	WH	GR	BL
ETL	2W	FZLV	WH	GR	BL



LEGENDA:

ETL – fitting EXIT L

E – electronic gear for BASIC self-contained fittings

C – electronic gear for STANDARD self-contained fittings

B – electronic gear for PREMIUM self-contained fittings

F – electronic gear for central battery fittings

Z – electronic gear for addressable central battery fittings

SE – non-maintained

SA – non-maintained/maintained

PT – manual test button

X – fitting without additional options

AT – autotest

RU – RUBIC UNA central monitoring system

CB – central battery version

CBS – central battery for circuit monitoring

ADE – central battery with ADE address module

ADP – central battery with ADP address module – SMART technology

FZLV – central battery FZLV 24 VDC

WH – white color

GR – grey color

BL – black color