

EDGE

PRO AUDIO

2016



EDGE

EDPRO37TA-E4



- 3.8" (98mm) Pro Audio Bullet Tweeter
- Aluminium Diaphragm
- Aluminium Front Housing
- Rms Power 75 Watts
- Peak Power 225 Watts
- Minimum Input 35 Watts Rms
- 25mm Voice Coil

FREQUENCY RESPONSE




EDGE

EDPRO38TA-E4



- 3.8" (98mm) Pro Audio Bullet Tweeter
- Titanium Diaphragm
- Aluminium Front Housing
- Rms Power 75 Watts
- Peak Power 225 Watts
- Minimum Input 35 Watts Rms
- 25mm Voice Coil

FREQUENCY RESPONSE

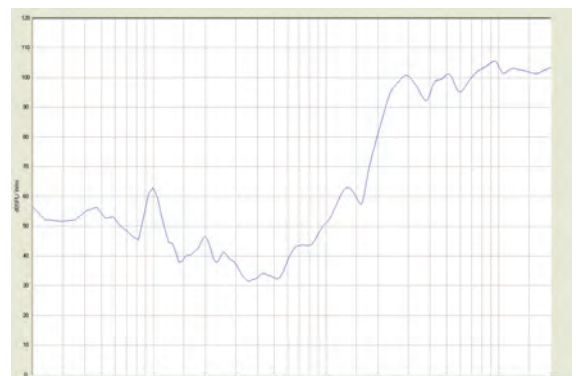


EDGE

EDPRO22T-E4



- 2.2" (58mm) Pro Bullet Tweeter
- Titanium Diaphragm
- Aluminium Front Housing
- Rms Power 100 Watts
- Peak Power 300 Watts
- Minimum Input 50 Watts Rms
- 25mm Voice Coil

FREQUENCY RESPONSE

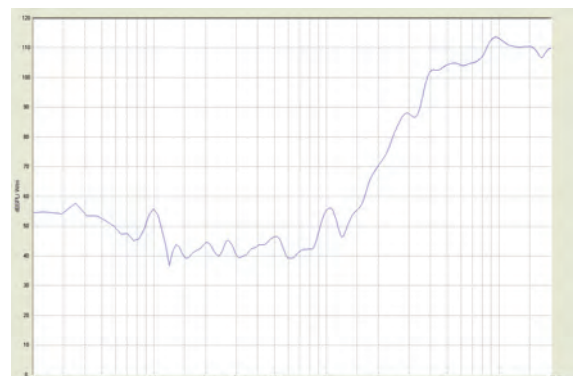


EDGE

EDPRO4TX-E4



- 4" (104mm) Pro Audio Compression Driver
- Ferro-Fluid Voice Coil Cooling
- Aluminium Front Housing
- Rms Power 150 Watts
- Peak Power 450 Watts
- Minimum Input 75 Watts Rms
- 44mm Voice Coil

FREQUENCY RESPONSE

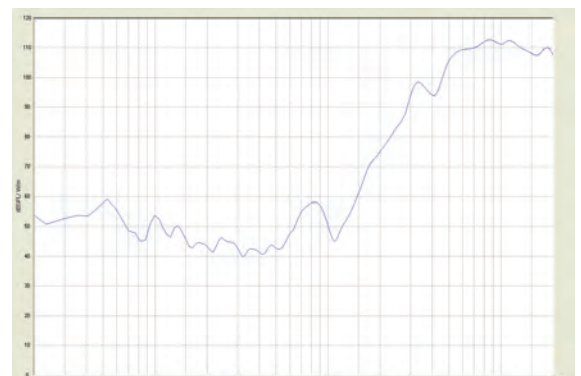


EDGE

EDPRO45T-E6



- 4.5" (115mm) Pro Audio Compression Driver
- Titanium Diaphragm
- Spring Loaded Terminals
- Rms Power 80 Watts
- Peak Power 240 Watts
- Minimum Input 40 Watts Rms
- 34mm Voice Coil

FREQUENCY RESPONSE

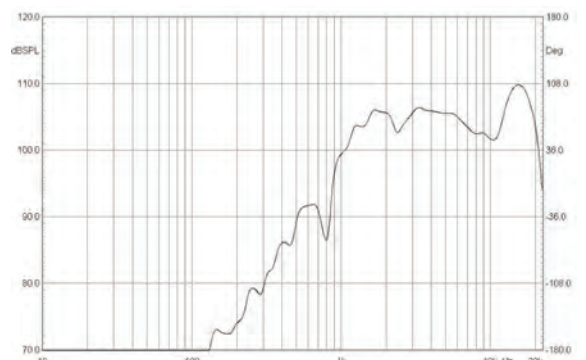

EDGE

EDPRO65B-E6




- 6.5" (165mm) Pro Audio Midrange
- Composite Woofer Cone
- Dual Roll Cloth Surround
- Rms Power 150 Watts
- Peak Power 300 Watts
- Minimum Input 75 Watts Rms
- 25mm Voice Coil

TS PARAMETERS

FMS	125.0HZ	NREF	0.734%
MMD	15.00 GR	BL	4.109 TM
KXM	4.850 MH	SPL	90.7dB
QMS	5.917	VAS	4.846 L
QES	1.246	KRM	5.844 OHMS
QTS	1.029	ERM	0.616
EXM	0.634		
CMS	0.19 MM/N		
MMS	8.373 GR		

FREQUENCY RESPONSE

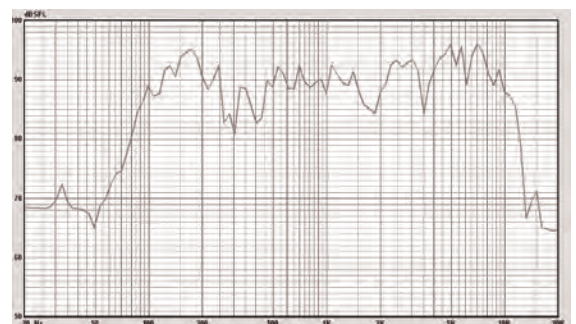

EDGE

EDPRO65VA-E6




- 6.5" (165mm) Pro Audio Vocal Midrange
- Composite Woofer Cone
- Dual Roll Cloth Surround
- Rms Power 130 Watts
- Peak Power 260 Watts
- Minimum Input 65 Watts Rms
- 38mm Voice Coil

TS PARAMETERS

FMS	164.8HZ	NREF	0.97%
RES	9.0 OHMS	BL	5.4 TM
RE	3.2 OHMS	SPL	91.9 DB
QMS	11.47	VAS	2.4 L
QES	1.09	RP	27.1 OHMS
QTS	0.99	LP	2.9 MH
RMS	0.9 KG/S	CP	528.5 UF
CMS	0.10 MM/N	LE	0.21 MH
MMS	9.4 GR		

FREQUENCY RESPONSE

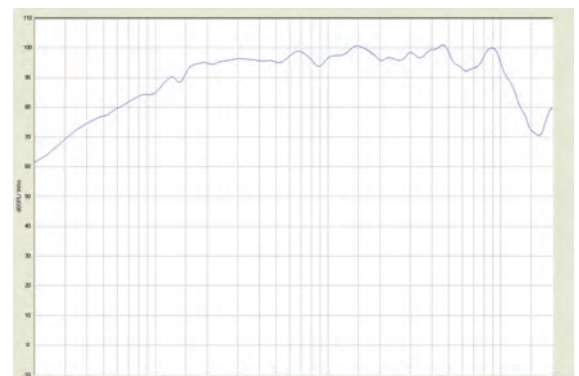

EDGE

EDPRO65P-E6




- 6.5" (165mm) Pro Audio Midrange
- Composite Woofer Cone
- Dual Roll Cloth Surround
- Rms Power 150 Watts
- Peak Power 300 Watts
- Minimum Input 75 Watts Rms
- 38mm Voice Coil

TS PARAMETERS

FMS	147.5HZ	NREF	1.02%
RES	11.9 OHMS	BL	6.2 TM
RE	3.2 OHMS	SPL	92.1dB
QMS	7.36	VAS	2.6 L
QES	0.79	RP	23.7 OHMS
QTS	0.71	LP	4.5 MH
RMS	1.3 KG/S	CP	415.1 UF
CMS	0.12 MM/N	LE	0.22 MH
MMS	10.1 GR		

FREQUENCY RESPONSE

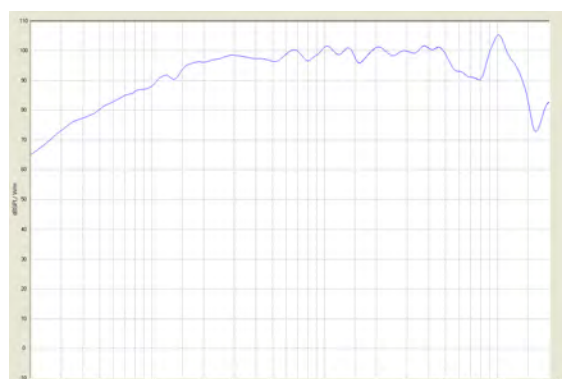

EDGE

EDPRO65C-E6




- 6.5" (165mm) Pro Audio Wideband Midrange
- Composite Woofer Cone
- Dual Roll Cloth Surround
- Rms Power 130 Watts
- Peak Power 260 Watts
- Minimum Input 65 Watts Rms
- 38mm Voice Coil

TS PARAMETERS

FMS	127.7HZ	NREF	1.07%
RES	10.2 OHMS	BL	5.7 TM
RE	3.2 OHMS	SPL	92.3dB
QMS	3.46	VAS	4.1 L
QES	0.76	RP	12.4 OHMS
QTS	0.62	LP	5.9 MH
RMS	3.2 KG/S	CP	537.6 UF
CMS	0.16 MM/N	LE	0.00 MH
MMS	9.7 GR		

FREQUENCY RESPONSE

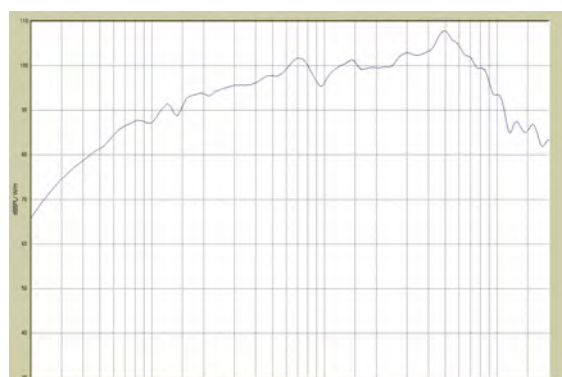

EDGE

EDPRO65L-E6




- 6.5" (165mm) Pro Audio Wideband Midrange
- Composite Woofer Cone
- Dual Roll Cloth Surround
- Rms Power 130 Watts
- Peak Power 260 Watts
- Minimum Input 65 Watts Rms
- 38mm Voice Coil

TS PARAMETERS

FMS	121.9HZ	NREF	1.39%
RES	11.4 OHMS	BL	6.1 TM
RE	3.2 OHMS	SPL	93.4 DB
QMS	3.35	VAS	4.7 L
QES	0.59	RP	14.5 OHMS
QTS	0.50	LP	7.5 MH
RMS	2.0 KG/S	CP	480.1 UF
CMS	0.19 MM/N	LE	0.00 MH
MMS	8.9 GR		

FREQUENCY RESPONSE

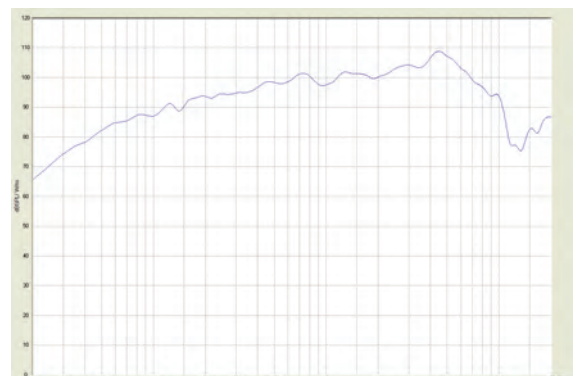

EDGE

EDPRO65G-E6




- 6.5" (165mm) Pro Audio Midrange
- Composite Woofer Cone
- Cast Aluminium Basket
- Rms Power 150 Watts
- Peak Power 300 Watts
- Minimum Input 75 Watts Rms
- 38mm Voice Coil

TS PARAMETERS

FMS	131.7HZ	NREF	1.47%
RES	12.2 OHMS	BL	6.3 TM
RE	3.2 OHMS	SPL	93.7dB
QMS	7.06	VAS	3.9 L
QES	0.59	RP	28.3 OHMS
QTS	0.54	LP	4.5 MH
RMS	1.0 KG/S	CP	354.6 UF
CMS	0.17 MM/N	LE	0.22 MH
MMS	8.6 GR		

FREQUENCY RESPONSE

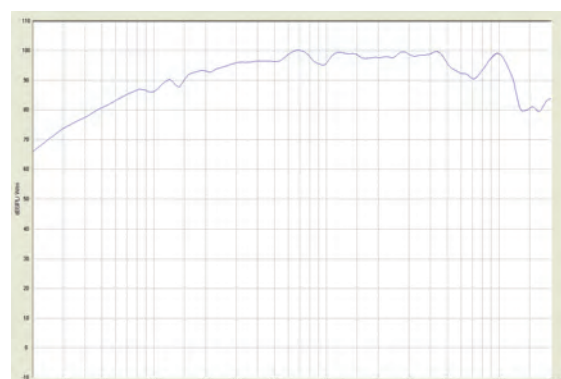

EDGE

EDPRO65FW-E6



- 6.5" (165mm) Pro Audio Full Range Speaker
- Composite Woofer Cone
- Cast Aluminium Basket
- Rms Power 150 Watts
- Peak Power 300 Watts
- Minimum Input 75 Watts Rms
- 38mm Voice Coil

TS PARAMETERS

FMS	96.5HZ	NREF	1.36%
RES	9.0 OHMS	BL	5.4 TM
RE	3.2 OHMS	SPL	93.3 DB
QMS	7.7	VAS	8.1 L
QES	0.52	RP	29.2 OHMS
QTS	0.49	LP	10.8 MH
RMS	0.7 KG/S	CP	444.3 UF
CMS	0.35 MM/N	LE	0.20 MH
MMS	7.7 GR		

FREQUENCY RESPONSE

