

TRIMLESS

TRIMMED

CASTOR 3

ROUND ADJUSTABLE REFLECTOR DOWNLIGHT


- Compatible with the 35 and 50 series ELR LED modules
- Colour temperature options: 2700K, 3000K, 4000K, 5000K, tuneWHITE™
- Colour rendering index: 85 or 95
- Up to 50,000 hour L70 lamp life with LM80 tested LED chip packages
- Beam pattern options: 12°, 20°, 35°, 60°
- Luminous flux: 800lm to 1650lm (depending on LED module)
- Supplied with non, phase, 0-10V or DALI dimmable LED driver
- Absolute photometry is used
- Trim, 77mm cutout
- Trimless, 76mm cutout
- +30° gimbal tilt
- Plaster in or with trim
- ATePS™ Automated Thermal Protection System
- Interchangeable LED module system
- Optional with IP54, color filters, light effect filter and honeycomb antiglare grille
- For the latest specifications please refer to the website

the information above is at nominal values accuracy of +/-7%

*ATePS™ Automated Thermal Protection System is the trademark of ELR

AVAILABLE OPTIONS

BEAM ANGLE



TEMPERATURE

2700K, 3000K, 4000K, 5000K



tuneWHITE™
(DALI TYPE 8, PART 209)
TUNABLE COLOUR TEMPERATURE
FROM 2700K TO 5000K

DRIVER



(ND)



(PH)



(AN)



(DA)

REFLECTOR STYLES



Order separately for IP54 and CUT OFF reflector type

REFLECTOR FINISH




reddot design award
winner 2012



product
design award
2014

DIMENSIONS (MM)

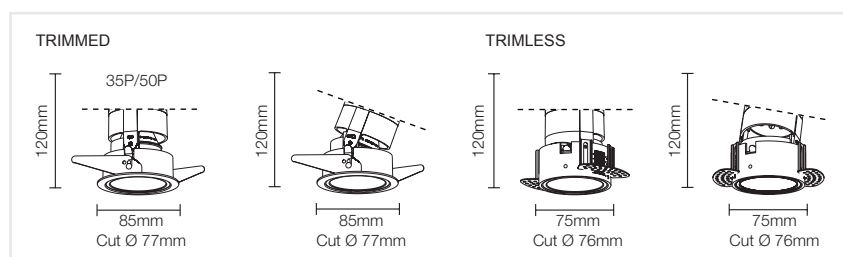

*tuneWHITE models are available for 50P, 100P and 300P modules and is compatible with DALI driver only
§12° beam angle options is for specification project only, please consult manufacturer for availability lead time



Data will be subject to change without notice.