



Desigo™

## 10.1-inch touch panel

## PXM40

For use with web interface PXG3.W100


- 
- Compact design with low built-in depth, for mounting in control panel doors
  - High-resolution TFT display with 262 k colors  
Resolution: 1280 x 800 pixels (wide screen)
  - Capacitive touch screen
  - Dimmable LED background lighting
  - Intuitive operation and monitoring of multiple plants or Desigo PX automation stations
  - Optimized for local operation of the Desigo building automation and control system
  - LED to indicate alarms while the screen is off
  - Connection via Ethernet RJ45
  - Commissioning wizard
  - Remote access via VNC to the touch panel
  - No additional mounting materials required

## Use

The Desigo PXM40 touch panel is designed for control panel mounting. It is used together with web interface PXG3.W100 and adapts the standard technology used for the web interface for local operation of the technical installations in the building. The touch panel allows for intuitive operation of multiple Desigo PX automation stations and allows for permanent monitoring of technical installations in a building. TCP/IP is used for communications.

## Functions

### Plant overview screenshot

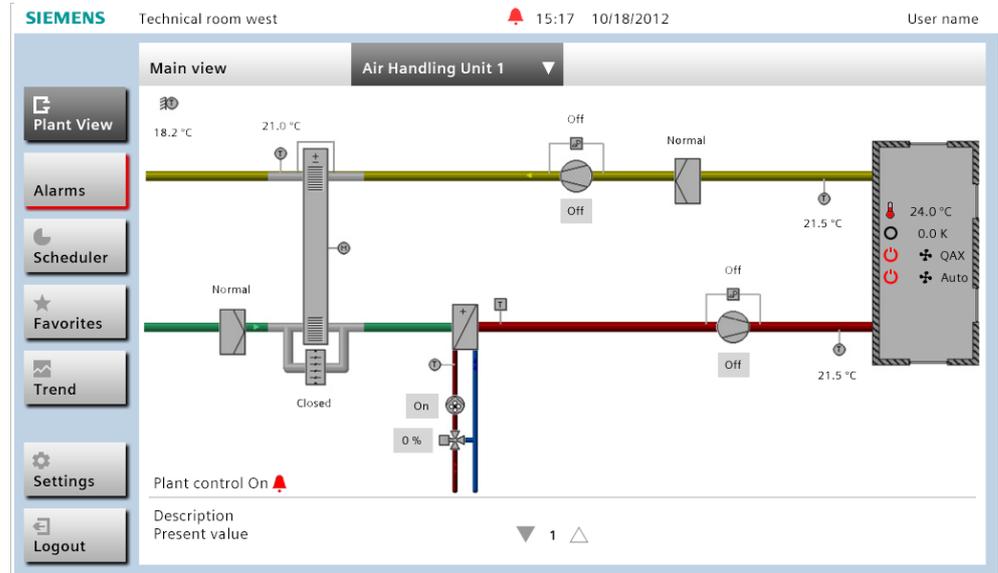

### Settings

Different settings are available for user-friendly operation of the touch panel. They can be edited following login.

Function	Description
Brightness	Sets the screen's relative brightness.
Language	Operating language of the touch panel.
Time format	24 or 12-hour (am/pm) display.
Date format	8 variants are available.
Keypad	Keypad layout: Standard QWERTY or Russian.
Auto logout	Time to logout: 5, 10, 15, 30, 45, 60 minutes.
VNC	Remote access to display (Computer → Touch Panel), switches to <b>Off</b> after logging off, default = <b>Off</b> . <b>⚠ Warning:</b> Activate this function only when needed. The function must be disabled for all other times.
Screensaver	Idle time: 15 minutes, default = <b>On</b> .
SSH	FW version ≤ V01.15.30.497 only. This function is intended only for internal service, and is thus available only to Siemens employees. Factory setting: <b>Off</b> . <b>⚠ Warning:</b> Activate this function only when needed. The function must be disabled for all other times.

Number of languages

There are 16 languages supported. English is the default operating language.

Auto logout	Automatic logout can be set at intervals of 5...60 minutes.
<b>Keypad</b>	The keypad is designed for two different language groups: <ul style="list-style-type: none"> <li>• Standard (for Latin-based languages and the so-called QWERTY layout), and</li> <li>• Russian (for Cyrillic languages; just Russian at this time).</li> </ul>
Keypad functionality	The interaction with the keypad is roughly the same as commercially available products such as smart phone, tablets, etc.
<b>Alarm LED</b>	Pending alarms are indicated by an LED on the top right of the touch panel.
Detailed documentation	For detailed information on setting and operating the touch panel, see the Operating instructions Desigo Touch and Web CM111028.

## Ordering

---

When ordering, please specify the name and **product number**.

Example:

Touch panel 10.1 inch PXM40

The touch panel is packed individually in a cardboard box and delivered together with the materials required for mounting.

Type	Stock number	Designation
PXM40	S55623-H119	Touch Panel 10.1"

## Equipment combinations

---

Device description	Type (ASN)	Documentation
Web interface BACnet/IP	PXG3.W100	CM1N9294


## Product documentation

---

Document type	Document no.
Data sheet web interface BACnet/IP PXG3.W100	CM1N9294
Installation and commissioning instructions Desigo Touch and Web	CM111029
Operating instructions Desigo Touch and Web	CM111028
Engineering and commissioning: Online help for Xworks Plus	CM111006

The touch panels are intended for mounting in control panel doors or operating tablets.

10.1" touch panel  
Front

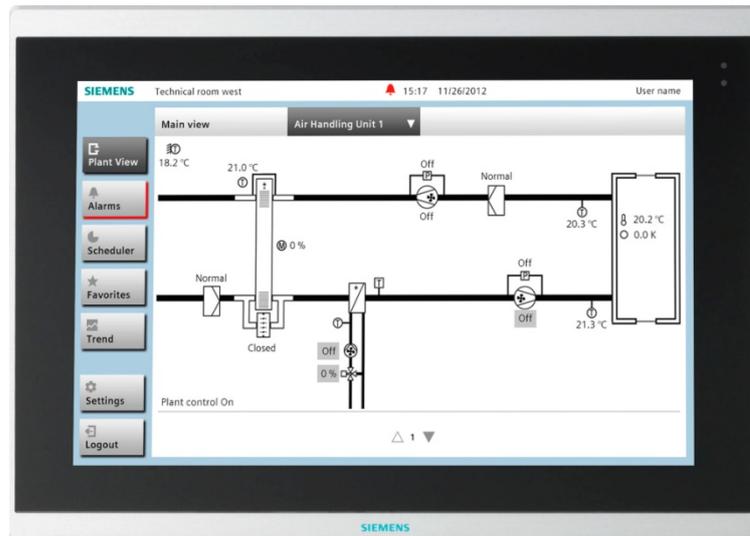

10.1" touch panel  
Rear



## Engineering

Desigo Xworks Plus is used to engineer Desigo Touch and Web. The application contains an integrated online help for engineering (CM111006en.chm).

## Mounting notes

### Mounting types

The touch panels can be integrated in the control panel door or in an operating table (e.g. remote control tablet).  
Mounting materials: Tension clamps and fixing screws are part of the delivery.  
The mounting instructions (CM1M9292) are printed on the packaging.

### Cutout for PXM40

See "Dimensions".

## Commissioning notes

---

Prerequisites	A properly set up web interface (PXG3.W100) is prerequisite to commissioning the touch panel.
Setting wizard	A setting wizard is available for the network/server settings of the touch panel. For more information, please see the Installation and commissioning instructions Desigo Touch and Web CM111029en.
Firmware download	The firmware can be downloaded via micro USB interface. For more information on firmware download, see the Installation and commissioning instructions Desigo Touch and Web CM111029en.

## Maintenance

---

The PXM40 touch panel does not require maintenance.


## Technical data

---

Power supply	Operating voltage	AC 24 V $\pm$ 20% (SELV) or AC 24 V class 2 (US) or DC 24 V $\pm$ 15% (SELV) or DC 24 V class 2 (US)
	Frequency	50/60 Hz
	Max. power consumption	
	At AC 24 V	Max. 14 VA *
	At DC 24 V	Max. 7 W *
		* No load on the USB interfaces
	Screw terminals for wire diameters up to	2.5 mm <sup>2</sup>
	External supply line protection (EU)	Fuse slow max. 10 A or Circuit breaker max. 13 A, Characteristic B, C, D according to EN 60898 or Power source with current limitation of max. 10 A
Display	Size	10.1 inch
	Resolution	1280 x 800
	Type	TFT
	Number of colors	262k
	Viewing angle H/V	Typically 170°/170°
	Background lighting	LED, dimmable
Touchpad	Type	Projective capacitive
Input/output	Ethernet	1x 10/100/1000 Mbit
	USB	1x USB 2.0 host, 1x USB device
	Serial	1x RS232
Backup	Settings	Saved permanently to flash memory

Protection data	Protection class	III as per EN 60950-1 (if installed correctly)		
	Housing protection	Front: IP54 Rear: IP20		
	Degree of pollution	As per EN 60529 (if installed correctly) 2 as per EN 60950-1		
Ambient conditions		<b>Operation</b>	<b>Transport</b>	<b>Storage</b>
		EN 60721-3-3	EN 60721-3-2	EN 60721-3-1
	Climatic conditions	Class 3K5	Class 2K3	Class 1K3
	Temperature	0...+50 °C	-25...+70 °C	-20...+65 °C
	Humidity	< 95% r.h. (non-condensing)	< 95% r.h.	< 95% r.h.
	Mechanical conditions	Class 3M2	Class 2M2	Class 1M2
	Elevation above sea level	Min. 700 hPa, corresponds to a maximum of 3000 meters above sea level.		
Standards, directives and approvals	Product standard	EN 60950-1	Information technology equipment – Safety	
	Product family standard	EN 50491-x	General requirements for Home and Building Electronic Systems (HBES) and Building Automation and Control Systems (BACS)	
	Electromagnetic compatibility (Applications)		For use in residential, commerce, light- industrial and industrial environments	
	EU conformity (CE)		CM1T9292xx *)	
	UL certification (US)		<a href="http://database.ul.com/">http://database.ul.com/</a>	
	UL certification (CA)		C22.2	
	RCM-conformity (EMC)		CM1T9292xx_Cx *)	
	EAC conformity		Eurasia conformity	
	CSA certification		<a href="http://directories.csa-international.org/">http://directories.csa-international.org/</a>	
	FCC		47 CFR Part 15 Class B	
Environmental compatibility	Product environmental declaration (contains data on RoHS compliance, materials composition, packaging, environmental benefit, disposal)	CM1E9292 *)		
	*) The documents can be downloaded from <a href="http://siemens.com/bt/download">http://siemens.com/bt/download</a> .			
Dimensions	See "Dimensions"			
Weight	Unit complete with accessories	1.3 kg		
Housing material	Front	Aluminum, colorless anodized and glass		
	Rear	Steel zinc plated		


## Connections

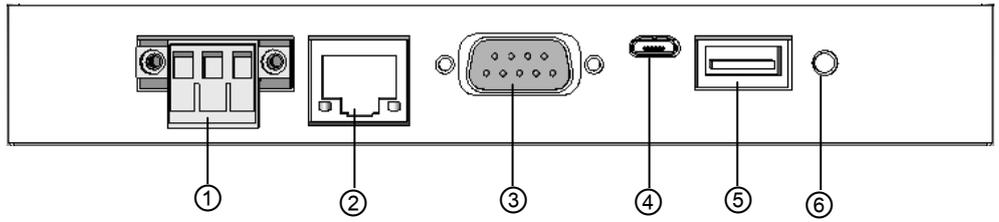

- |              |                    |
|--------------|--------------------|
| ① 24 V AC/DC | ④ Micro-USB-Device |
| ② LAN RJ45   | ⑤ USB-Host         |
| ③ COM        | ⑥ Reset            |


## Dimensions

All dimensions in mm

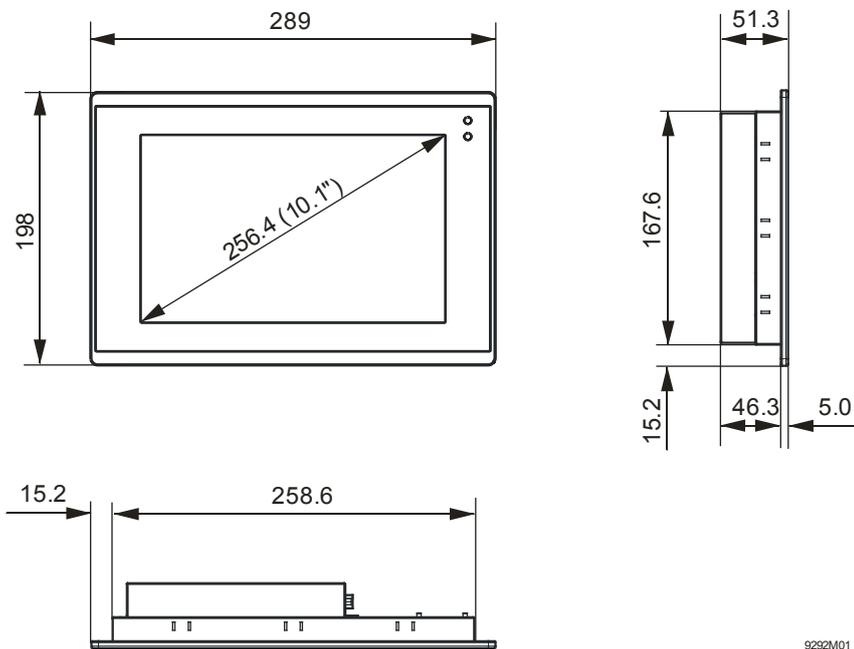

Cutout for PXM40

A cutout dimensioned as follows is required to mount the touch panel in the control panel door.

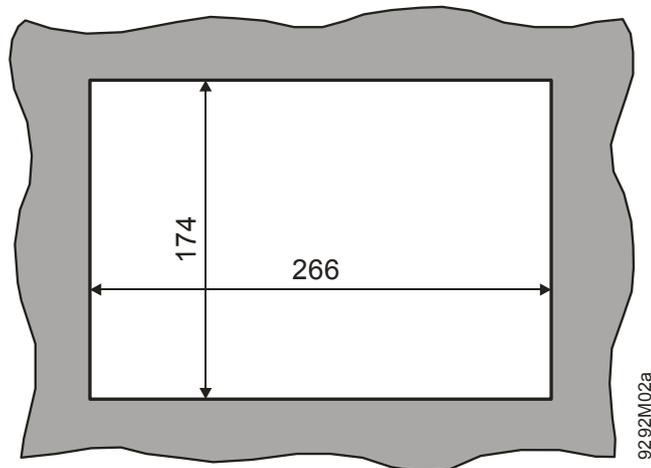

Wall thickness: 1 mm to 4 mm

## Disposal

---



The devices are considered electronics devices for disposal in terms of European Directive 2012/19/EU and may not be disposed of as domestic garbage.

- Dispose of the devices through channels provided for this purpose.
- Comply with all local and currently applicable laws and regulations.

Published by:  
Siemens Switzerland Ltd.  
Building Technologies Division  
International Headquarters  
Gubelstrasse 22  
6301 Zug  
Switzerland  
Tel. +41 41-724 24 24  
[www.siemens.com/buildingtechnologies](http://www.siemens.com/buildingtechnologies)

© Siemens Switzerland Ltd 2013  
Delivery and technical specifications subject to change