

# SPG Series

## SPG12-390W 12V100Ah



UPS LAB  
 Официальный дилер в РФ  
 www.UPS-LAB.ru  
 +7 (495) 109-90-77



SPG series VRLA battery uses AGM technology and high-purity raw materials. It has good high power discharge, floating backup and fast charging performance. It is mainly used in UPS/EPS standby power supply systems. It can backup power in poor operation environment.

### Benefits

- Long life according to EUROBAT Classification
- Maximum charge efficiency
- High gas recombination efficiency
- Low self-discharge rate
- Easy installation and handling
- Horizontal or vertical installization


### Applications

- UPS units
- Data center
- Starting generators
- EPS units

### Standards

- IEC 60896-21/22
- JIS C8704-1/2
- EUROBAT guide
- Installation compliant with EN 50272-2

### Drawing

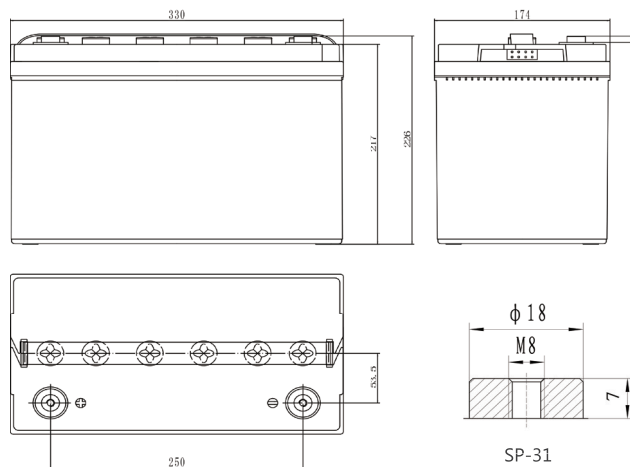

### Specifications





Battery Model	SPG12-390W			
Design Life (years, 25°C)	12			
Capacity (Ah, 25°C)	10min ( 1.60V)	15min ( 1.67V)	1HR (69.3A, 1.70V)	10HR 10A, 1.80V)
	494W/cell	390W/cell	69.3Ah	100Ah
Dimensions (mm)	Length	Width	Height	Total Height
	330	174	217	226
Approx. Weight (kg)	31.6			
Reference Internal Resistance (mΩ)	3.80 ( fully charged @ 25°C)			
Maximum Discharge Current (A/5 Sec.)	1200			
Self-Discharge (25°C)	≤ 2% per months			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.40(-4mV/°C/cell), max charge current: 30A		2.27(-3mV/°C/cell)	
Short Circuit Current (A)	3150			

### Discharge Data

Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min							h						
	5	10	15	20	25	30	45	1	1.5	2	3	5	6	10
1.60	380	285	228	190	162	138	96.2	76.8	52.4	41.5	29.7	19.3	16.5	11.0
1.65	350	271	220	181	155	133	93.7	74.3	50.8	40.3	28.8	18.7	16.1	10.7
1.67	336	260	210	175	150	128	90.4	72.1	50.0	39.6	28.4	18.4	15.9	10.6
1.70	315	245	197	165	142	123	87.3	69.3	49.0	38.9	27.9	18.1	15.7	10.4
1.75	300	230	183	153	132	115	82.5	66.8	47.6	37.9	27.1	17.7	15.4	10.2
1.80	288	212	168	145	125	109	76.3	63.5	45.8	36.6	26.3	17.3	15.0	10.0

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min							h						
	5	10	15	20	25	30	45	1	1.5	2	3	5	6	10
1.60	640	494	410	346	286	260	186	147	112	85.3	63.7	40.3	34.3	22.6
1.65	623	480	398	335	277	252	181	141	109	82.8	62.1	39.2	33.8	22.4
1.67	595	470	390	329	271	244	177	139	106	80.8	60.8	38.3	33.3	22.2
1.70	570	460	385	321	266	238	175	136	104	79.4	60.0	37.7	32.7	21.9
1.75	552	447	372	308	256	229	170	132	102	77.7	58.2	36.9	32.1	21.6
1.80	533	429	355	298	247	220	163	127	98.0	75.1	56.3	35.9	31.3	21.2

### Performance Curve

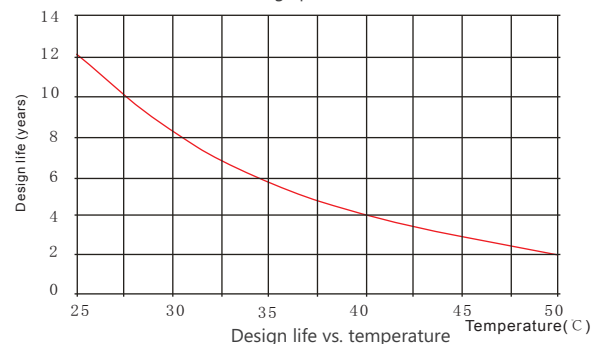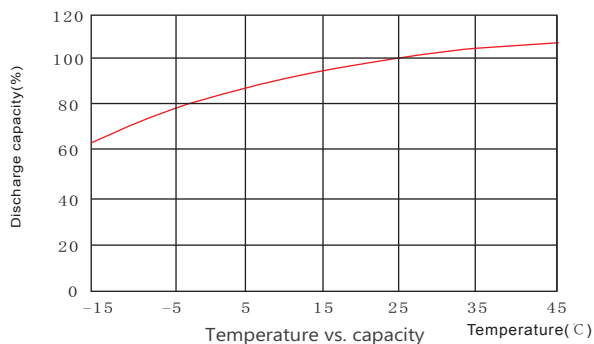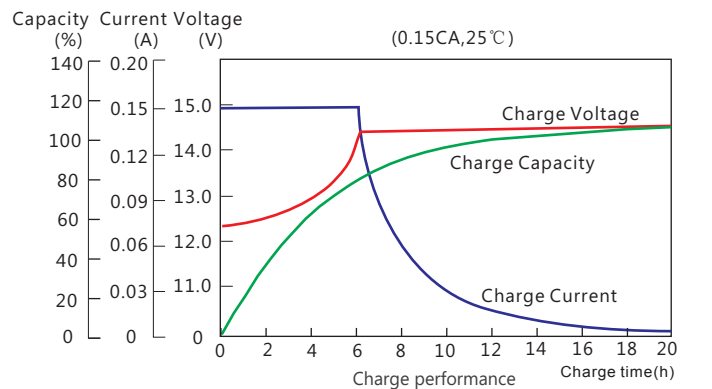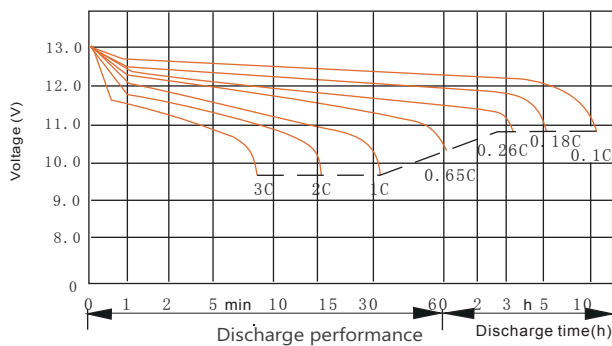

#### Sacred Sun Power Sources Co., Ltd.

No.1 Shengyang Road Qufu City, PRC  
sales@sacredsun.cn

#### Sacred Sun Asia Pacific

No. 15, Yishun Industrial Street 1,  
#01-17, WIN5, Singapore 768091  
sales.asia@sacredsun.cn

#### Sacred Sun Europe SPRL

Schoenstraat 96-9140 Temse, Belgium  
sales.eu@sacredsun.cn

#### Sacred Sun MEA FZE

S10122A1019 Jebel Ali, Dubai,  
United Arab Emirates  
sales.mea@sacredsun.cn

