



CBHD2

Main features:

Reduced weight and dimensions


Power from 180W up to 480W

Current from 15A to 20A

Available with Led on side or Led on top

APPLICATIONS



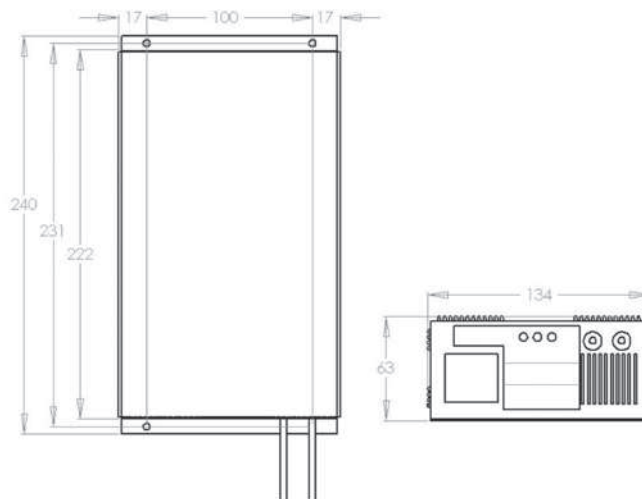

DIMENSIONS (LxWxH): 134x240x63 mm – 5.28x9.45x2.48 in
 WEIGHT: 2,20 Kg - 4.85 lbs
 PROTECTION GRADE IP30
 INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

| Battery Voltage | Battery Range | | Charging Current | Model |
|-----------------|---------------|--------------|------------------|-------|
| | 5h | 20h | | |
| 12V | 100 ÷ 150 Ah | 130 ÷ 180 Ah | 15A | 12-15 |
| | 120 ÷ 195 Ah | 150 ÷ 235 Ah | 20A | 12-20 |
| 24V | 100 ÷ 150 Ah | 130 ÷ 180 Ah | 15A | 24-15 |
| | 120 ÷ 195 Ah | 150 ÷ 235 Ah | 20A | 24-20 |

