



CBHD1 SMALL

Main features:

Reduced weight and dimensions


Power from 30W up to 120W

Current from 8A to 10A

Available with Led on side or Led on top

APPLICATIONS



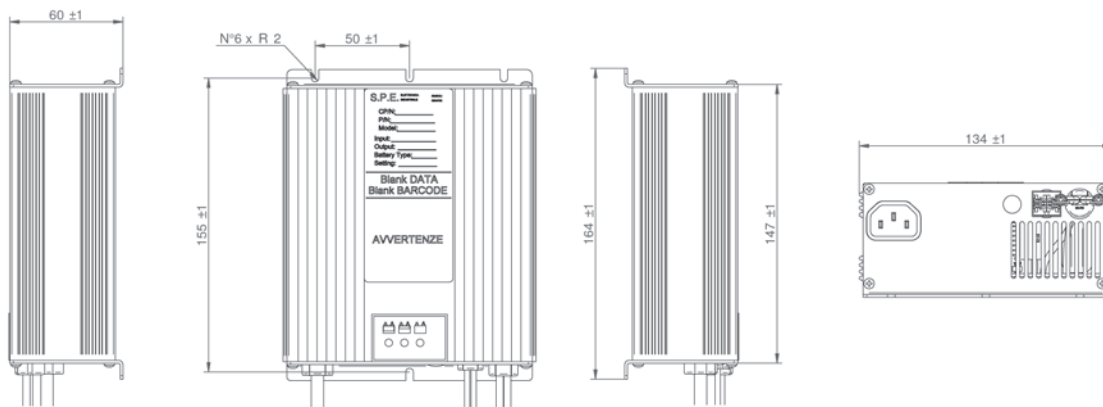

DIMENSIONS (LxWxH): 134x164x60 mm – 5.28x6.46x2.36 in
 WEIGHT: 1,80 Kg - 3.97 lbs
 PROTECTION GRADE IP30
 INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	40 ÷ 80 Ah	60 ÷ 105 Ah	8A	12-8
	60 ÷ 100 Ah	70 ÷ 130 Ah	10A	12-10
24V	40 ÷ 80 Ah	60 ÷ 105 Ah	8A	24-8
	60 ÷ 100 Ah	70 ÷ 130 Ah	10A	24-10

