


Universal, two-sided emergency lighting fitting **TIGER DS LED** – instalation instruction

ACCESSORIES



Specifications:


- power supply 230V 50-60Hz,
- high-temperature battery Ni-Cd, charge time 24 hours, Ni-MH - 12 hours,
- electric power network and battery charge LED indicator,
- protection level Ip22, safety class II,
- electronic protection against complete battery discharge,
- ambient temperature 0°C–+40 °C,
- emergency operation time 1,2 or 3hours,
- connecting clips 3x2,5mm, recognition distance 20m
- optional PT or RS,
- compatibility with standard specyfifications EN60598,EN1838

White plastic body, transparent or opal polycarbonate cover.


Mounting:

- wall, ceiling,
- optional dry-wall or underplastering.


1.

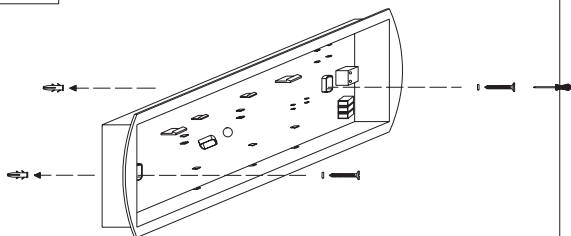


4.

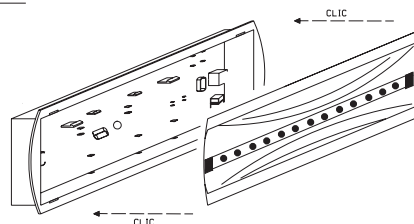


2.

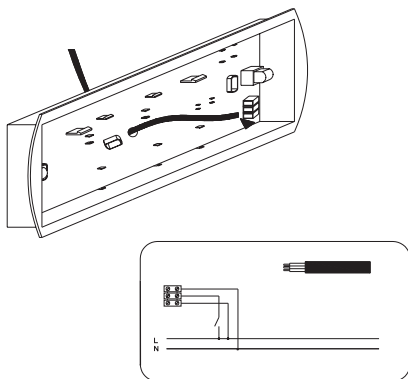

5.

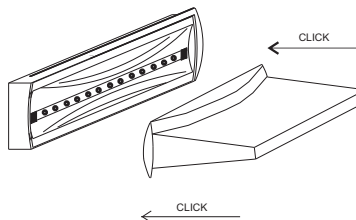


3.

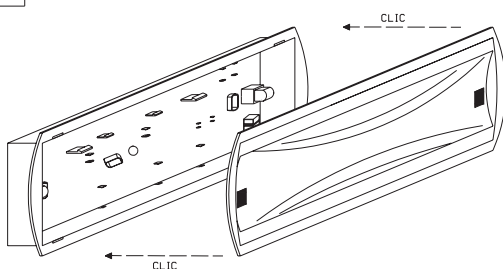


2a

(SE) NON-MAINTAINED



(SA) MAINTAINED



awex
EMERGENCY LIGHTING

P.P.H.U. AWEX
Ul. Długa 39 Masłomiaça
32-091 Michałowice Poland
tel: +48 12 681 55 00
fax: +48 12 681 55 22
www.awex.eu